

EUROCARD HOLDER

SKP 31/II

Screw terminals 31-pole (DIN 41617) Connection via double row terminals on one side


With the vertical snap adapter SASA 135 Art.-No. 63900 the holder can be mounted at right-angles on the rail. The D2 size is for a card without a front plate.


To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

Link to Product





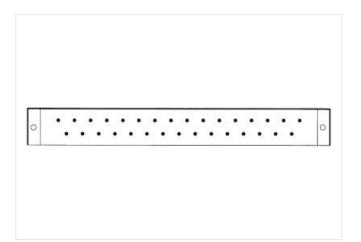



Product may differ from Image



Commercial data		
ECLASS-6.0	27260710	
ECLASS-6.1	27260704	
ECLASS-7.0	27440402	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi



ECLASS-8.0	27440402	
ECLASS-9.0	27460201	
ECLASS-10.1	27440402	
ECLASS-11.1	27460201	
ECLASS-12.0	27460201	
ETIM-5.0	EC002780	
customs tariff number	85366990	
GTIN	4048879042208	
Packaging unit	1	
Electrical data Supply		
Operating voltage AC	250 V	
Operating current max.	5 A	
Installation		
Connection cross-section solid max.	4 mm ²	
Installation Pin assignment		
No. of poles	31	
Device protection Electrical		
Overvoltage category (EN 60664-1)	Ι	
Device protection Media		
Flame resistance	flame retardant	
Mechanical data		
Type of socket connector	DIN 41617	
Mechanical data Material data		
Material housing	Plastic	
Mechanical data Mounting data		
Mounting method	screwed, geschnappt	
Suitable for mounting type	mounting rail, (EN 60715)	
Height	137 mm	
Width	63 mm	
Depth	170 mm	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-25

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi