

EXACT8, 4XM8, 3 POLE BASIC HOUSING, NPN-LED'S

Without connector cable

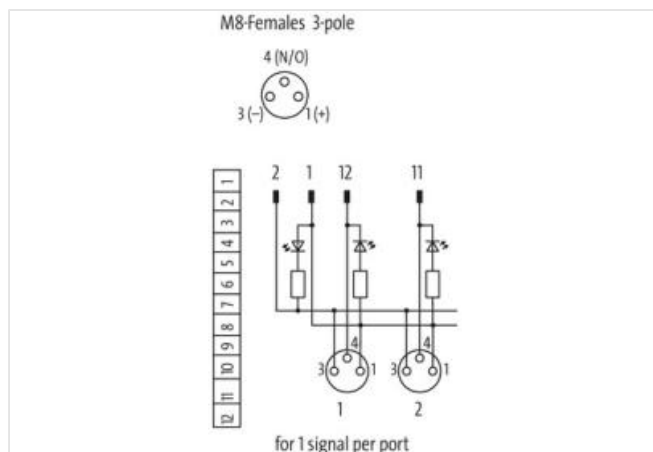
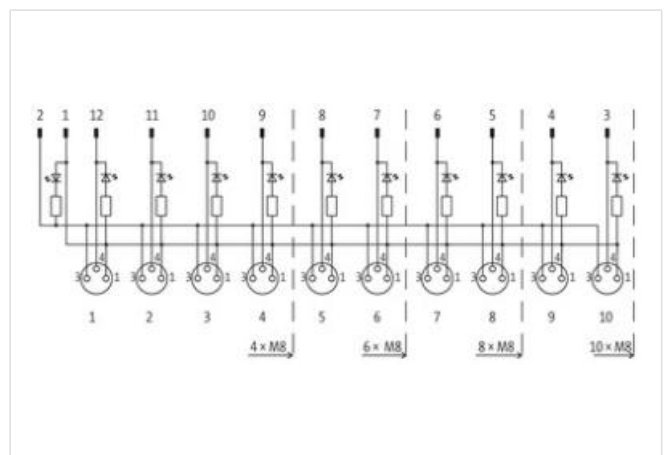
4-way, 3-pole

Inline face or side mounting

for NPN signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)
Kuvat


Tuote voi erota kuvassa olevasta


Kaupalliset tiedot

ECLASS-6.0	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108

ETIM-5.0	EC002585
GTIN	4048879056601
Pakkauskoko	1
Tullinumero	85369010
Electrical data Supply	
Operating voltage DC	24 V
Current operating per contact max.	2 A
Total current max.	8 A
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP65, IP67
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C
Additional condition temperature range	depending on cable quality
Connection type 2	
Family construction form	Cap
No. of poles	12
Family construction form	M8
Gender	female
Color contact carrier	black
Coding	A
No. of poles	3
PIN 1	+
PIN 3	-
PIN 4	S