




**MASI67 INSTALLATION TECHNOLOGY**

Converter 2x profile cable to M12 female

MASI67 converter  
2x profile cable to M12 (female)  
Connection cables are in the online shop under "Connection Technology".

[Link to Product](#)

Illustration

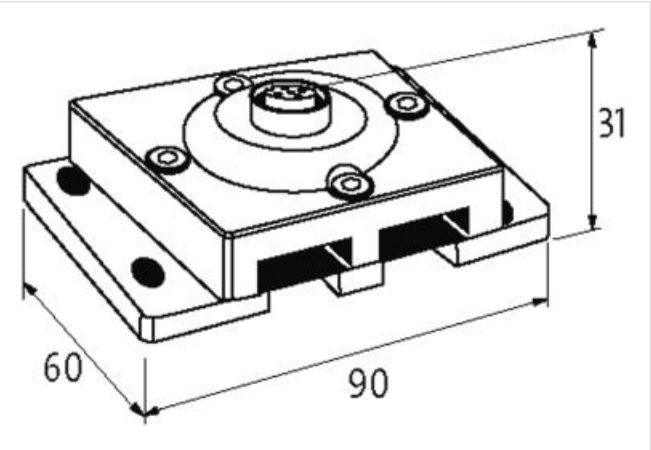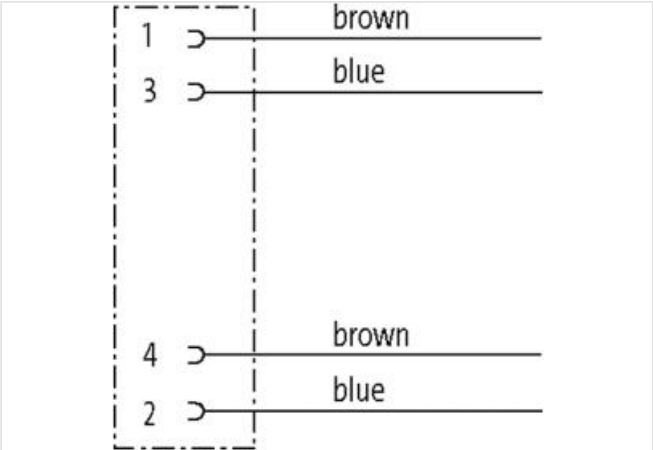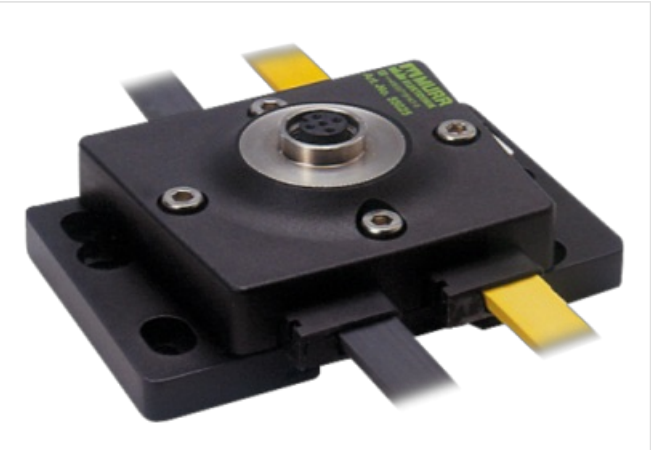

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27400209 |
| ECLASS-6.1      | 27279219 |
| ECLASS-7.0      | 27279219 |
| ECLASS-8.0      | 27279219 |
| ECLASS-9.0      | 27440108 |
| ECLASS-10.1     | 27440111 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27440111      |
| ECLASS-12.0           | 27440111      |
| ETIM-5.0              | EC001583      |
| customs tariff number | 85369010      |
| GTIN                  | 4048879052146 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                           |      |
|---------------------------|------|
| Operating voltage DC max. | 36 V |
| Total current max.        | 4 A  |

**Device protection | Electrical**

|                                     |       |
|-------------------------------------|-------|
| Degree of protection (EN IEC 60529) | IP67  |
| Insulation strength ASI/Power       | 200 V |

**Mechanical data | Mounting data**

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | screwed, geschnappt       |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 90 mm                     |
| Width                      | 74 mm                     |
| Depth                      | 30,5 mm                   |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -40 °C |
| Storage temperature max.   | 80 °C  |

**Conformity**

|                  |            |
|------------------|------------|
| Product standard | EN 60664-1 |
|------------------|------------|

**Connection type 1**

|                          |         |
|--------------------------|---------|
| Connection type 1        | Bus Out |
| Family construction form | M12     |
| Gender                   | female  |
| Color contact carrier    | black   |
| Coding                   | A       |
| No. of poles             | 5       |
| PIN 1                    | AS-i +  |
| PIN 2                    | 0 V     |
| PIN 3                    | AS-i -  |
| PIN 4                    | 24 V DC |
| PIN 5                    | n.c.    |