



MODLINK MSDD FRAME DBL METAL

Nickeled

Frame: metal, matte nickel plated  
Lid: metal, matte nickel plated

Link to Product

Illustration

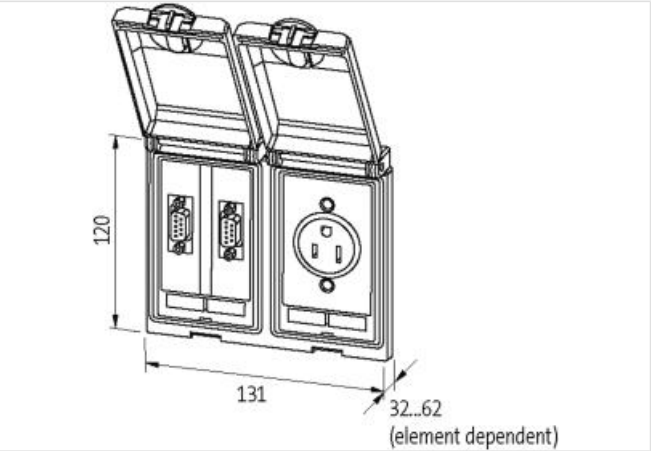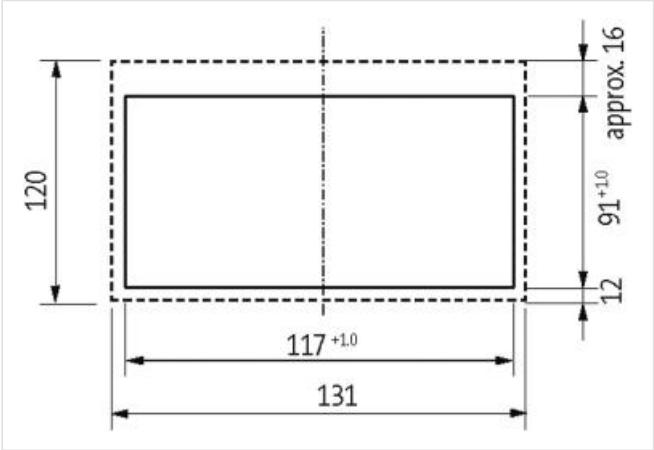

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27189217 |
| ECLASS-6.1      | 27189260 |
| ECLASS-7.0      | 27189260 |
| ECLASS-8.0      | 27189260 |
| ECLASS-9.0      | 27189260 |
| ECLASS-10.1     | 27182810 |
| ECLASS-11.1     | 27182810 |
| ECLASS-12.0     | 27182810 |

|                       |               |
|-----------------------|---------------|
| ETIM-5.0              | EC002625      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879035286 |
| Packaging unit        | 1             |

**Device protection**

|          |     |
|----------|-----|
| Shielded | yes |
|----------|-----|

**Mechanical data | Mounting data**

|        |        |
|--------|--------|
| Height | 120 mm |
| Width  | 130 mm |
| Depth  | 35 mm  |

**Frame**

|                                               |                       |
|-----------------------------------------------|-----------------------|
| Degree of protection (EN IEC 60529)           | IP65                  |
| Operating temperature min.                    | -10 °C                |
| Operating temperature max.                    | 60 °C                 |
| Storage temperature min.                      | -25 °C                |
| Storage temperature max.                      | 60 °C                 |
| Suitable for installation wall thickness min. | 1 mm                  |
| Suitable for installation wall thickness max. | 5 mm                  |
| Coating housing                               | surface finished      |
| Material housing                              | Fine zinc die casting |