


**Modlink MSDD set contains: Frame 4000-68513-0000001**

Insert 4000-68000-4500000

## Link to Product

### Illustration

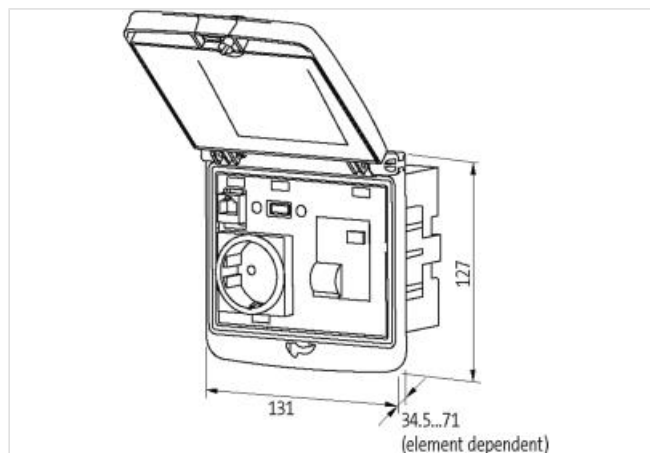

Product may differ from Image

**Commercial data**

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27189234      |
| ECLASS-6.1            | 27189217      |
| ECLASS-7.0            | 27189217      |
| ECLASS-8.0            | 27189217      |
| ECLASS-9.0            | 27189217      |
| ECLASS-10.1           | 27182806      |
| ECLASS-11.1           | 27182806      |
| ECLASS-12.0           | 27182806      |
| ETIM-5.0              | EC002625      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879693523 |
| Packaging unit        | 1             |

**Frame**

|                                               |          |
|-----------------------------------------------|----------|
| Degree of protection (EN IEC 60529)           | IP65     |
| Operating temperature min.                    | -30 °C   |
| Operating temperature max.                    | 70 °C    |
| Storage temperature min.                      | -30 °C   |
| Storage temperature max.                      | 80 °C    |
| Suitable for installation wall thickness min. | 1 mm     |
| Suitable for installation wall thickness max. | 5 mm     |
| Color cover                                   | metallic |
| Color housing                                 | black    |
| Material lid                                  | ABS      |
| Material housing                              | PA       |

**Shielding plate**

|                        |                  |
|------------------------|------------------|
| Connection information | Threaded hole M4 |
| Tightening torque      | 0,9 Nm           |

**Germany (VDE)**

|                               |                           |
|-------------------------------|---------------------------|
| Connection cross section max. | 2,5 mm <sup>2</sup>       |
| AWG number max.               | 14                        |
| Operating voltage AC          | 250 V                     |
| Operating current             | 16 A                      |
| Connection                    | Spring clamp terminals FK |
| No. of poles                  | 2 + PE                    |
| Connections per pole          | 2                         |
| Protection contact present    | yes                       |