

**M12 female recept. B-cod. rear**

PUR 1x2xAWG24 shielded vt UL/CSA+drag ch. 4m

Flange female

M12, 2-pole

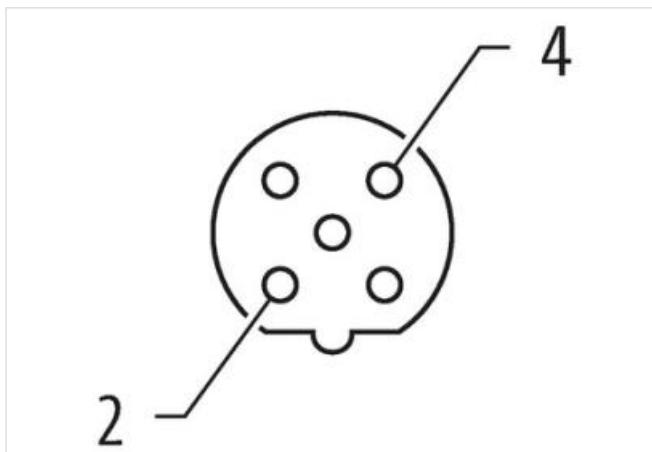
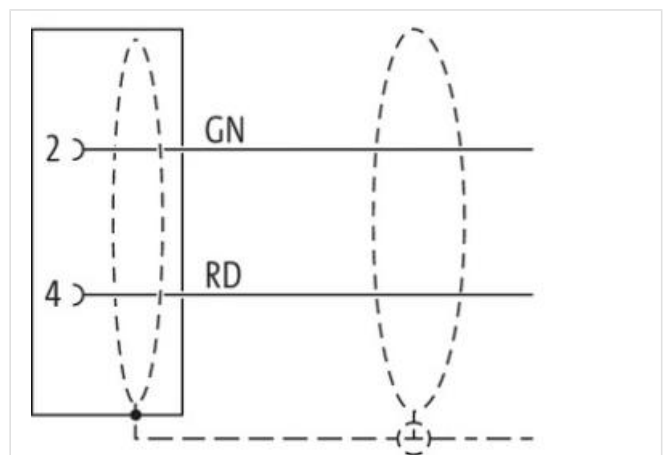
B-coded

shielded

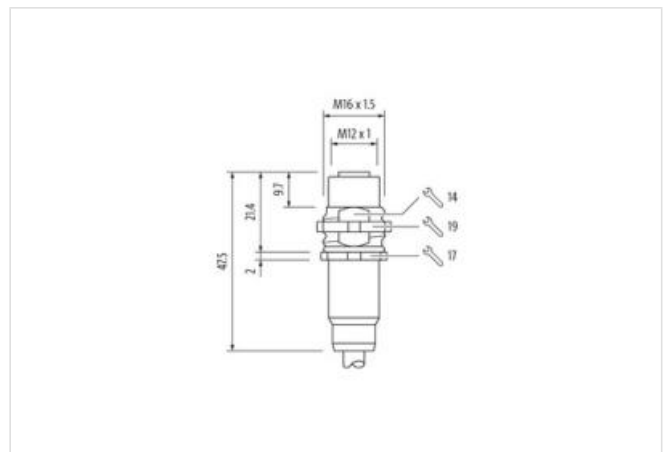
Rear mounting

Further cable lengths on request.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image



Cable length 4 m

**Side 1**

Tightening torque 0,6 Nm

|                                     |                   |
|-------------------------------------|-------------------|
| Mounting method                     | inserted, screwed |
| Coating contact                     | gold plated       |
| Family construction form            | M12               |
| Thread                              | M12 x 1           |
| Coding                              | B                 |
| Material contact                    | Copper alloy      |
| Material                            | Brass             |
| No. of poles                        | 2                 |
| Degree of protection (EN IEC 60529) | IP67              |

**Side 2**

|                           |             |
|---------------------------|-------------|
| Stripping length (jacket) | 20 mm       |
| Coating contact           | gold plated |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27279221      |
| ECLASS-6.1            | 27279220      |
| ECLASS-7.0            | 27440103      |
| ECLASS-8.0            | 27440103      |
| ECLASS-9.0            | 27440103      |
| ECLASS-10.1           | 27440103      |
| ECLASS-11.1           | 27440103      |
| ECLASS-12.0           | 27440103      |
| ETIM-5.0              | EC001855      |
| customs tariff number | 85444290      |
| GTIN                  | 4048879760669 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage AC max.          | 60 V |
| Operating voltage DC max.          | 60 V |
| Current operating per contact max. | 4 A  |

**Diagnostics**

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

**Installation | Connection**

|                           |           |
|---------------------------|-----------|
| Stripping length (jacket) | 20 mm     |
| Mounting set              | M16 x 1.5 |
| Width across flats        | SW19      |

**Device protection | Electrical**

|  |                   |
|--|-------------------|
| Protection NEMA                        | 3, 4, 6P          |
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 1,5 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                           |               |
|---------------------------|---------------|
| Coating locking           | nickel plated |
| Coating of fitting        | nickel plated |
| Material gasket           | FKM           |
| Locking material          | Brass         |
| Material screw connection | Brass         |

**Mechanical data | Mounting data**

|                    |                |
|--------------------|----------------|
| Mounting method    | Schraubgewinde |
| Looking techniques | Schraubgewinde |

**Environmental characteristics | Climatic**

|  |                            |
|--|----------------------------|
| Operating temperature min.             | -25 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

#### Important installation notes

|                        |   |
|------------------------|---|
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.   |
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |

#### Approvals

|        |     |
|--------|-----|
| UL 50E | yes |
|--------|-----|

#### Installation | Cable

|   |  |
|---|--|
| Cable identification                              | 841  |
| Jacket Color                                      | violet   |
| Type of Certificate                               | cURus  |
| Amount stranding                                  | 1  |
| Stranding   | 2 wires with 2 Filler twisted                                  |
| Cable shielding (type)                            | copper braid, tinned   |
| Cable shielding (coverage)                        | 85 %   |
| Banding   | Fleece, Foil   |
| Filler  | yes  |
| wire arrangement                                  | red, green   |
| Traversing distance (C-track)                     | 5 m @ 25 °C   horizontal                                       |
| Cable weight                                      | 70,4 g/m   |
| Material jacket                                   | PUR  |
| Shore hardness jacket                             | 87 ± 3 Shore A   |
| Freedom from ingredients (jacket)                 | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free |
| Outer-diameter (jacket)                           | 7,7 mm   |
| Tolerance outer diameter (sheath)                 | ± 5 %  |
| Amount wires                                      | 2  |
| Outer diameter insulation                         | 2,55 mm  |
| Outer diameter tolerance core insulation          | ± 5 %  |
| Shore hardness wire insulation                    | 60 ± 3 Shore D   |
| Ingredient freeness wire insulation               | lead-free, cadmium-free, CFC-free, halogen-free                |
| Amount strands (wire)                             | 19   |
| Diameter of single wires                          | 24 AWG   |
| Conductor crosssection (wire)                     | 24 AWG   |
| Material conductor wire                           | Stranded copper wire, bare                                     |
| Nominal voltage AC max.                           | 300 V  |
| Current load capacity (standard)                  | to DIN VDE 0298-4  |
| Current load capacity min. wire                   | 4,5 A  |
| Electrical resistance line constant wire          | 72,2 Ω/km @ 20 °C  |
| AC withstand voltage (wire - wire)                | 2 kV @ 60 s  |
| Electric capacitance                              | 29000 pF/km  |
| Power frequency withstand voltage (wire - jacket) | 2 kV @ 60 s  |
| AC withstand voltage (wire - shield)              | 2 kV @ 60 s  |
| Min. operating temperature (static)               | -40 °C   |
| Max. operating temperature (fixed)                | 80 °C  |
| Operating temperature min. (dynamic)              | -20 °C   |
| Operating temperature max. (dynamic)              | 70 °C  |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090            |
| chemical resistance                               | Good, application-related testing                              |
| Gasoline resistance                               | Good, application-related testing                              |
| Oil resistance                                    | Good, application-related testing   DIN EN 60811-404           |

|                          |                      |
|--------------------------|----------------------|
| Bending radius (fixed)   | 7,5 x Outer diameter |
| Bending radius (dynamic) | 12 x Outer diameter  |
| Travel speed (C-track)   | 5 Mio. @ 25 °C       |