

Adaptor M8 on top A-cod. / MSUD valve plug C-8mm

Adapter

Form C (8 mm) – M8, connector top entry

24 V AC ±20% / DC ±25%

LED and suppression

3-pole


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration



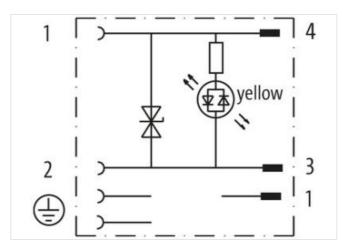

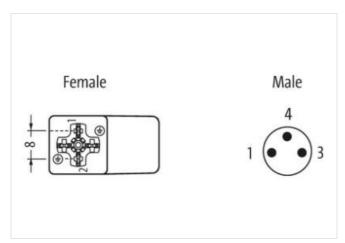

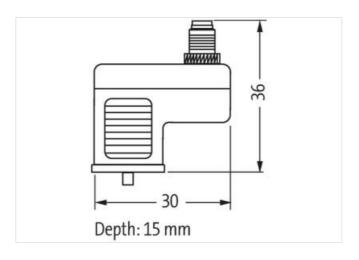

Product may differ from Image

Commercial data		
ECLASS-6.0	27143423	
ECLASS-7.0	27449001	
ECLASS-8.0	27449001	
ECLASS-9.0	27440321	
ECLASS-10.1	27440106	
ECLASS-11.1	27440106	
ECLASS-12.0	27440106	
ETIM-5.0	EC001855	
customs tariff number	85366990	

Operating temperature max.

Note on strain relief

Note on bending radius

Important installation notes



GTIN	4048879347426
Packaging unit	1
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	19,2 V
Operating voltage AC max.	28,8 V
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Cut-off peak voltage max.	55 V
Current operating per contact max.	4 A
Current consumption max.	15 mA
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M3 / M8
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Rated surge voltage	0,8 kV
Environmental characteristics Climatic	
Operating temperature min.	-25 °C

Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be

85 °C

endangered by excessive bending forces.