



T-Coupler M12 male / M12 female A-cod. V2A

5-pol. / 2x 4-pol.


T-coupler
Male straight – females straight
M12 – M12, 5-pole
Distribution function (NO)
V2A nut/screw
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

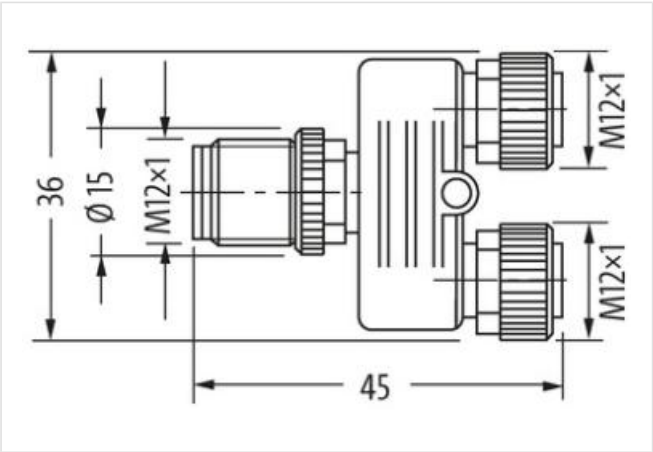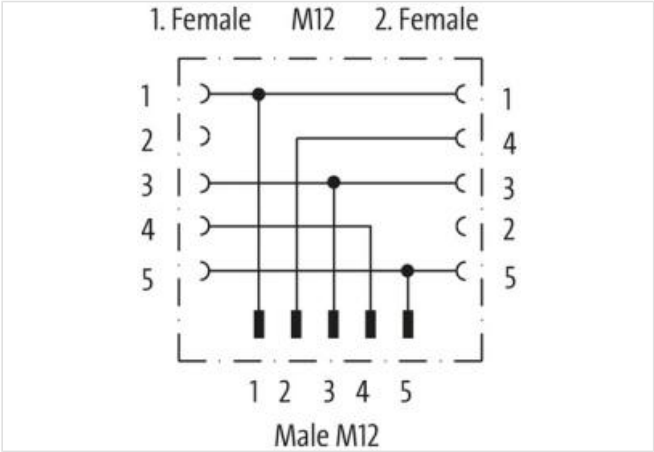

Product may differ from Image

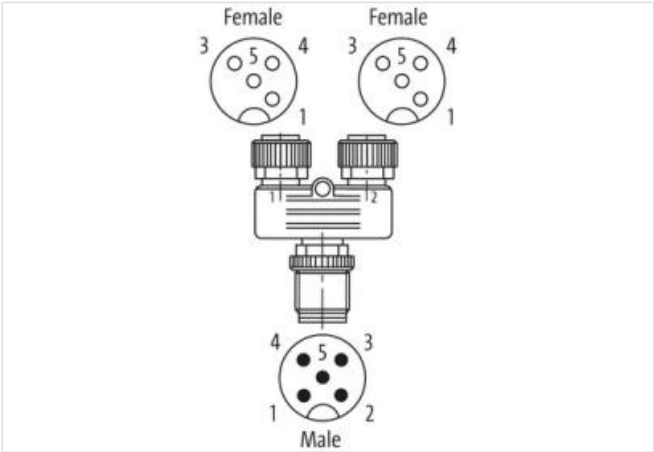

| Side 1 | |
|--------------------------|--------------------|
| Tightening torque | 0,6 Nm |
| Mounting method | screwed, pluggable |
| Family construction form | M12 |

| | |
|-------------------------------------|---------|
| Thread | M12 x 1 |
| Gender | female |
| Coding | A |
| No. of poles | 4 |
| Width across flats | SW13 |
| Degree of protection (EN IEC 60529) | IP67 |

Side 2

| | |
|-------------------------------------|--------------------|
| Tightening torque | 0,6 Nm |
| Mounting method | screwed, pluggable |
| Family construction form | M12 |
| Thread | M12 x 1 |
| Gender | female |
| Coding | A |
| No. of poles | 4 |
| Width across flats | SW13 |
| Degree of protection (EN IEC 60529) | IP67 |

Side 3

| | |
|-------------------------------------|--------------------|
| Mounting method | screwed, pluggable |
| Family construction form | M12 |
| Coding | A |
| No. of poles | 5 |
| Degree of protection (EN IEC 60529) | IP67 |
| Gender | male |
| Tightening torque | 0,6 Nm |
| Width across flats | SW13 |
| Thread | M12 x 1 |

Commercial data

| | |
|-----------------------|---------------|
| ECLASS-6.0 | 27279221 |
| ECLASS-6.1 | 27279221 |
| ECLASS-7.0 | 27440104 |
| ECLASS-8.0 | 27440104 |
| ECLASS-9.0 | 27440106 |
| ECLASS-10.1 | 27440106 |
| ECLASS-11.1 | 27440106 |
| ECLASS-12.0 | 27440106 |
| ETIM-5.0 | EC002635 |
| customs tariff number | 85366990 |
| GTIN | 4048879111775 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|------------------------------------|------|
| Operating voltage AC max. | 60 V |
| Operating voltage DC max. | 60 V |
| Current operating per contact max. | 4 A |

Diagnostics

| | |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

Installation | Connection

| | |
|-------------------|---------|
| Tightening torque | 0,6 Nm |
| Mounting set | M12 x 1 |

Device protection | Electrical

| | |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
|----------------------------------------|-------------------|

Mechanical data | Material data

