

B10 Surface mounted h., IP68

Screw locking, side entry M32


B10  
Surface mounted housing  
Screw locking  
IP68  
Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



Product may differ from Image

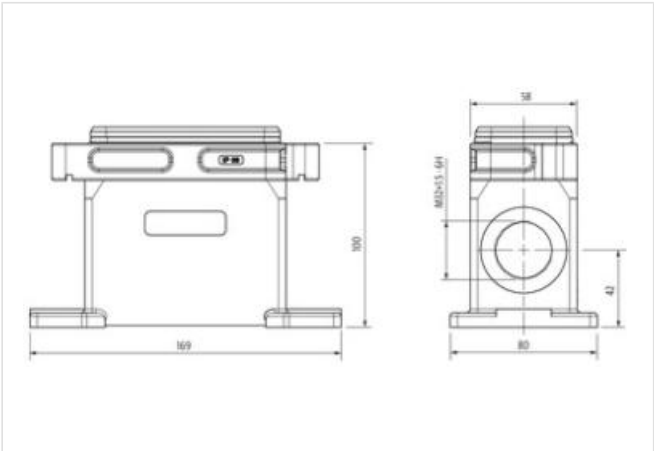

Commercial data

|                       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27143424      |
| ECLASS-6.1            | 27261203      |
| ECLASS-7.0            | 27440202      |
| ECLASS-8.0            | 27440202      |
| ECLASS-9.0            | 27440202      |
| ECLASS-10.1           | 27440202      |
| ECLASS-11.1           | 27440202      |
| ECLASS-12.0           | 27440202      |
| ETIM-5.0              | EC000437      |
| customs tariff number | 85389099      |
| GTIN                  | 4048879647373 |
| Packaging unit        | 1             |

Installation

Cable outlet laterally

Installation | Connection

|                    |     |
|--------------------|-----|
| Mounting set       | M32 |
| Mating cycles min. | 500 |

Device protection | Electrical

|                                        |                                         |
|----------------------------------------|-----------------------------------------|
| Degree of protection (EN IEC 60529)    | IP68                                    |
| Additional condition protection degree | inserted, locked, with screw connection |

Mechanical data

Housing type Surface mounted housing

Mechanical data | Material data

|                                                 |                      |
|-------------------------------------------------|----------------------|
| Coating housing                                 | powder-coated        |
| Material gasket                                 | Silicon              |
| Material housing                                | Aluminum die casting |
| Locking material                                | Stainless steel      |
| <b>Mechanical data   Mounting data</b>          |                      |
| Size                                            | B10                  |
| Mounting method                                 | Screw locking        |
| Height                                          | 100 mm               |
| Width                                           | 80 mm                |
| Depth                                           | 169 mm               |
| <b>Environmental characteristics   Climatic</b> |                      |
| Operating temperature min.                      | -40 °C               |
| Operating temperature max.                      | 125 °C               |
| Climatic category (EN IEC 60068-1)              | 40/125/21            |