


Single locking lever, top entry M25

B6
Hood (low)
Single locking lever
IP67
Technical data will be only guaranteed with Murrelektronik components.

Illustration



Product may differ from Image

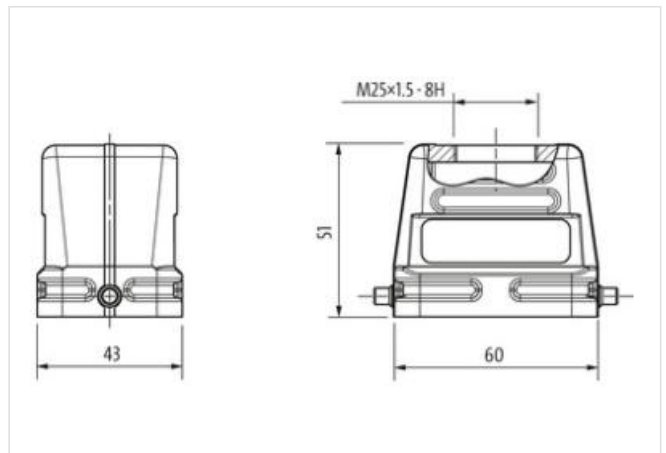

ECLASS-6.0	27143424
ECLASS-6.1	27261203
ECLASS-7.0	27440202
ECLASS-8.0	27440202
ECLASS-9.0	27440202
ECLASS-10.1	27440202
ECLASS-11.1	27440202
ECLASS-12.0	27440202
ETIM-5.0	EC000437
customs tariff number	85389099
GTIN	4048879647212
Packaging unit	1

Cable outlet	straight
--------------	----------

Mounting set	M25
Mating cycles min.	500

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, locked, with screw connection

Housing type	Hood
Public housing	100%
Private housing	100%
Homeless	100%
Other	100%

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-18

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

Coating housing	powder-coated
-----------------	---------------

Coating locking	verzinkt
-----------------	----------

Material housing	Aluminum die casting
------------------	----------------------

Locking material	Steel
------------------	-------

Mechanical data | Mounting data

Size	B6
------	----

Height	51 mm
--------	-------

Width	43 mm
-------	-------

Depth	60 mm
-------	-------

Locking techniques	Single locking lever
--------------------	----------------------

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
----------------------------	--------

Operating temperature max.	100 °C
----------------------------	--------

Climatic category (EN IEC 60068-1)	40/100/21
------------------------------------	-----------