

EXACT12, 8XM12, 5-POLE, BASIC HOUSING

Without homerun-cable

8-way, 5-pole Form PNP Screw plug-in terminals


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.


Link to Product

Illustration







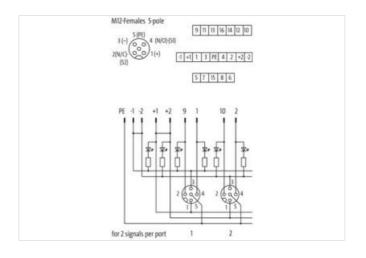

Product may differ from Image









Commercial data		
ECLASS-6.0	27143423	
ECLASS-6.1	27279219	
ECLASS-7.0	27279219	
ECLASS-8.0	27279219	

Environmental characteristics | Climatic

Operating temperature min.

Operating temperature max.

-20 °C

70 °C



ECLASS-9.0	27440108		
ECLASS-10.1	27440111		
ECLASS-11.1	27440111		
ECLASS-12.0	27440111		
ETIM-5.0	EC002585		
customs tariff number	85369010		
GTIN	4048879054065		
Packaging unit	1		
Electrical data Supply			
Operating voltage DC	24 V		
Current operating per contact max.	4 A		
Total current max.	8 A		
Device protection Electrical			
Degree of protection (EN IEC 60529)	IP65, IP67		
Device protection Media			
Flame resistance	flame retardant		
Mechanical data Material data			
Material housing	Plastic		