

SIEMENS CONTACTOR SUPPRESSOR



RC, 110VAC/DC

48 V AC/DC  
110 V AC/DC  
RC

For other configurations and voltages, please inquire.

Linkki tuotteeseen

Kuvat

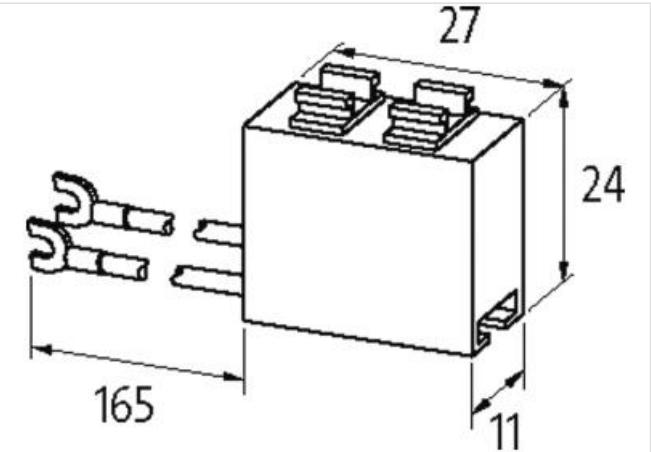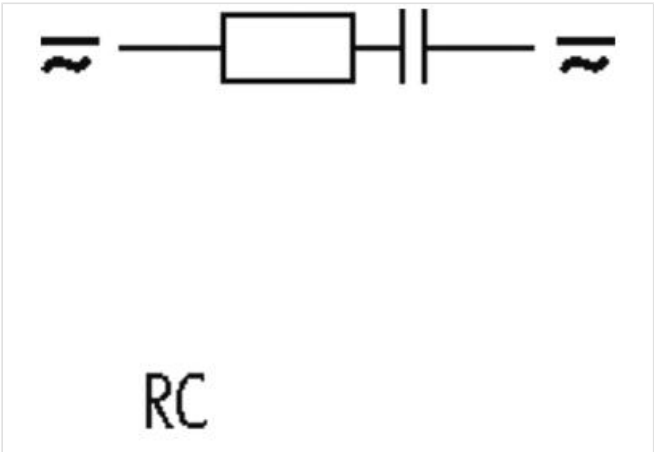

Tuote voi erota kuvassa olevasta



| Kaupalliset tiedot |          |
|--------------------|----------|
| ECLASS-6.0         | 27371013 |
| ECLASS-6.1         | 27371013 |
| ECLASS-7.0         | 27371013 |
| ECLASS-8.0         | 27371013 |
| ECLASS-9.0         | 27371013 |
| ECLASS-10.1        | 27371013 |

|                                          |                                             |
|------------------------------------------|---------------------------------------------|
| ECLASS-11.1                              | 27371013                                    |
| ECLASS-12.0                              | 27371013                                    |
| ETIM-5.0                                 | EC002498                                    |
| GTIN                                     | 4048879019798                               |
| Pakkauskoko                              | 1                                           |
| Tullinumero                              | 85363010                                    |
| Compatibility   Compatible with          |                                             |
| Appropriate contactors                   | 3 TH 3/4/8; 3 TF 30...45; 3 TB 40...3 TB 44 |
| Electrical data                          |                                             |
| Damping factor                           | 1.5× UN                                     |
| Electrical data   Input                  |                                             |
| Input voltage AC min.                    | 48 V                                        |
| Input voltage AC max.                    | 127 V                                       |
| Input voltage DC min.                    | 48 V                                        |
| Input voltage DC max.                    | 127 V                                       |
| Installation   Connection                |                                             |
| Connection information                   | self-securing cable forks                   |
| Device protection   Media                |                                             |
| Flame resistance                         | flame retardant                             |
| Mechanical data   Material data          |                                             |
| Combustibility class housing (UL94)      | V-0                                         |
| Material housing                         | Plastic                                     |
| Mechanical data   Mounting data          |                                             |
| Height                                   | 11 mm                                       |
| Width                                    | 27 mm                                       |
| Depth                                    | 24 mm                                       |
| Environmental characteristics   Climatic |                                             |
| Operating temperature min.               | -20 °C                                      |
| Operating temperature max.               | 70 °C                                       |