

## MOTOR SUPPRESSOR

RC, 3x690VAC/7,5kW

3x 400 V AC

3x 575 V AC

3x 690 V AC



RC

For DIN-rail mounting use 2xArt.-No. 20900 adapter feet

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

### Linkki tuotteeseen

#### Kuvat

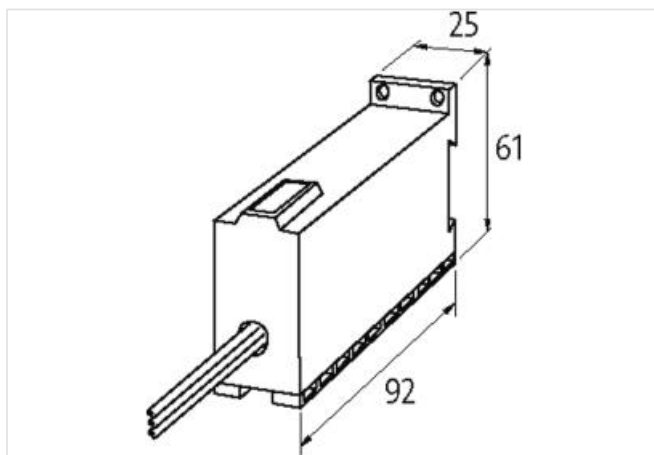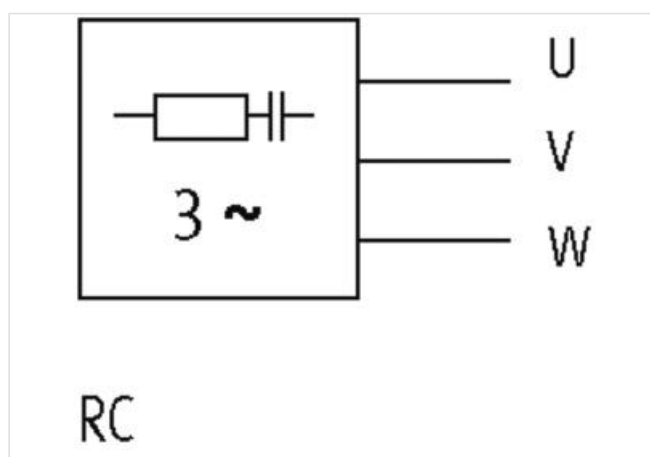

Tuote voi erota kuvassa olevasta



#### Kaupalliset tiedot

|            |          |
|------------|----------|
| ECLASS-6.0 | 27371013 |
| ECLASS-6.1 | 27371013 |
| ECLASS-7.0 | 27371013 |

|                                                 |                                |
|-------------------------------------------------|--------------------------------|
| ECLASS-8.0                                      | 27371013                       |
| ECLASS-9.0                                      | 27371013                       |
| ECLASS-10.1                                     | 27371013                       |
| ECLASS-11.1                                     | 27371013                       |
| ECLASS-12.0                                     | 27371013                       |
| ETIM-5.0                                        | EC000197                       |
| GTIN                                            | 4048879019347                  |
| Pakkauskoko                                     | 1                              |
| Tullinumero                                     | 85363010                       |
| <b>Electrical data   Supply</b>                 |                                |
| Power frequency                                 | 50 ... 60 Hz                   |
| <b>Electrical data   Input</b>                  |                                |
| Input voltage AC                                | 690 V                          |
| <b>Installation</b>                             |                                |
| Connection cross section max.                   | 1 mm <sup>2</sup>              |
| <b>Installation   Connection</b>                |                                |
| Connection information                          | Single strands                 |
| Length single strands                           | 500 mm                         |
| <b>Device protection   Media</b>                |                                |
| Flame resistance                                | flame retardant                |
| <b>Mechanical data   Material data</b>          |                                |
| Combustibility class housing (UL94)             | V-0                            |
| Material housing                                | Plastic                        |
| Material potting compound                       | 2-component epoxy              |
| <b>Mechanical data   Mounting data</b>          |                                |
| Mounting method                                 | geschnappt                     |
| Suitable for mounting type                      | Mounting rail TH35, (EN 60715) |
| Height                                          | 92 mm                          |
| Width                                           | 61 mm                          |
| Depth                                           | 25 mm                          |
| <b>Environmental characteristics   Climatic</b> |                                |
| Operating temperature min.                      | -20 °C                         |
| Operating temperature max.                      | 60 °C                          |