

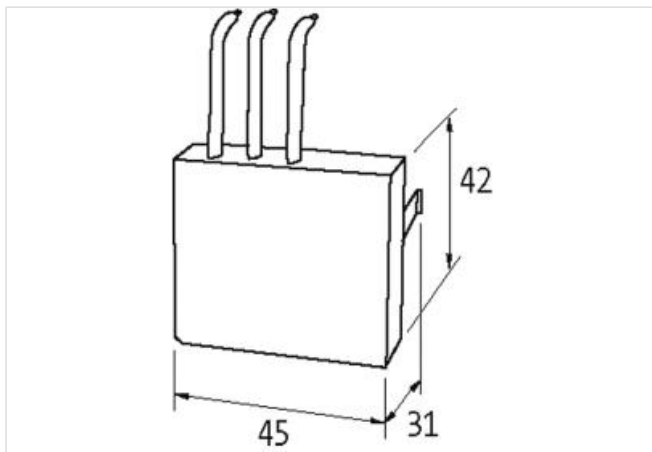
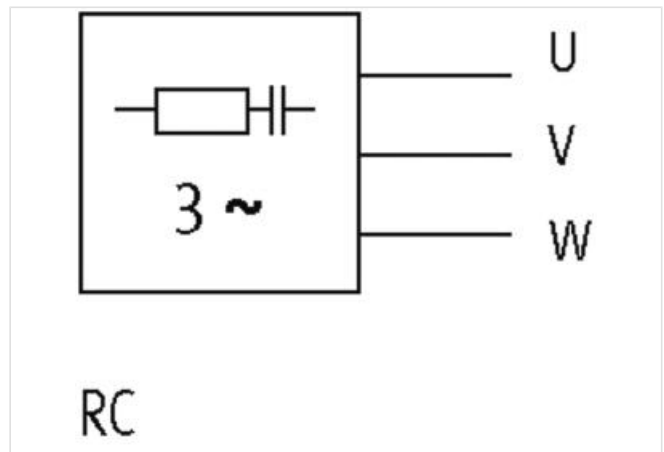
**SUPPRESSOR FOR SIEMENS CONTACTOR S00 MOTOR**

RC, star, 3x575 VAC, 7.5 kW

3 × 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Linkki tuotteeseen](#)
**Kuvat**


Tuote voi erota kuvassa olevasta


**Kaupalliset tiedot**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371013 |
| ECLASS-6.1  | 27371013 |
| ECLASS-7.0  | 27371013 |
| ECLASS-8.0  | 27371013 |
| ECLASS-9.0  | 27371013 |
| ECLASS-10.1 | 27371013 |

|                                                 |                                                      |
|-------------------------------------------------|------------------------------------------------------|
| ECLASS-11.1                                     | 27371013                                             |
| ECLASS-12.0                                     | 27371013                                             |
| ETIM-5.0                                        | EC002498                                             |
| GTIN                                            | 4048879412742                                        |
| Pakkauskoko                                     | 1                                                    |
| Tullinumero                                     | 85363010                                             |
| <b>Electrical data   Supply</b>                 |                                                      |
| Power frequency                                 | 50 ... 60 Hz                                         |
| <b>Electrical data   Input</b>                  |                                                      |
| Input voltage AC                                | 575 V                                                |
| <b>Installation   Connection</b>                |                                                      |
| Connection information                          | Connection wires                                     |
| <b>Device protection   Media</b>                |                                                      |
| Flame resistance                                | flame retardant                                      |
| <b>Mechanical data   Material data</b>          |                                                      |
| Combustibility class housing (UL94)             | V-0                                                  |
| Material housing                                | Plastic                                              |
| Material potting compound                       | 2-component epoxy                                    |
| <b>Mechanical data   Mounting data</b>          |                                                      |
| Mounting method                                 | geschnappt                                           |
| Suitable for mounting type                      | Siemens Schütz Sirius 3 RT 201 mit Federzuganschluss |
| Height                                          | 42 mm                                                |
| Width                                           | 45 mm                                                |
| Depth                                           | 31 mm                                                |
| <b>Environmental characteristics   Climatic</b> |                                                      |
| Operating temperature min.                      | -20 °C                                               |
| Operating temperature max.                      | 60 °C                                                |