

## ABB CONTACTOR SUPPRESSOR

Varistor, 230VAC/DC



230 V AC/DC

VDR

For other configurations and voltages, please inquire.

### [Linkki tuotteeseen](#)

#### Kuvat

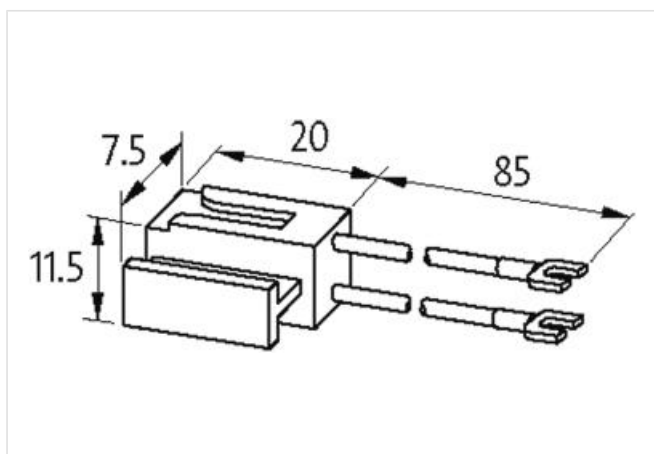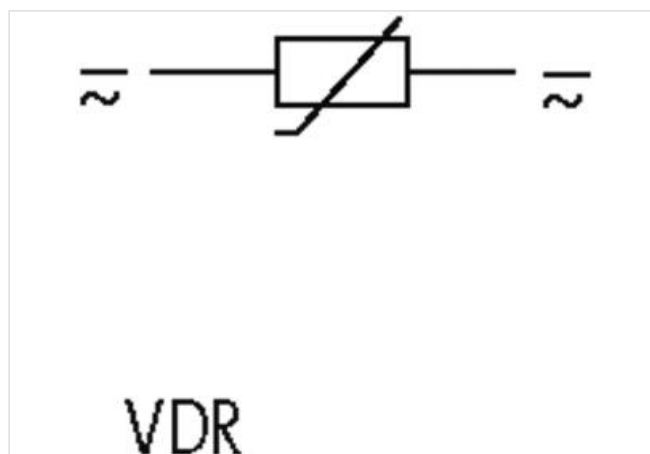

Tuote voi erota kuvassa olevasta



#### Kaupalliset tiedot

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27371013 |
| ECLASS-6.1  | 27371013 |
| ECLASS-7.0  | 27371013 |
| ECLASS-8.0  | 27371013 |
| ECLASS-9.0  | 27371013 |
| ECLASS-10.1 | 27371013 |

|             |               |
|-------------|---------------|
| ECLASS-11.1 | 27371013      |
| ECLASS-12.0 | 27371013      |
| ETIM-5.0    | EC002498      |
| GTIN        | 4048879018425 |
| Pakkauskoko | 1             |
| Tullinumero | 85363010      |

Compatibility | Compatible with

|                        |                       |
|------------------------|-----------------------|
| Appropriate contactors | B 6, BC 6, KC 6, VB 6 |
|------------------------|-----------------------|

Electrical data

|                |         |
|----------------|---------|
| Damping factor | 1.5× UN |
|----------------|---------|

Electrical data | Input

|                       |       |
|-----------------------|-------|
| Input voltage AC min. | 150 V |
| Input voltage AC max. | 250 V |
| Input voltage DC min. | 150 V |
| Input voltage DC max. | 250 V |

Installation | Connection

|                        |                           |
|------------------------|---------------------------|
| Connection information | self-securing cable forks |
|------------------------|---------------------------|

Device protection | Media

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

Mechanical data | Material data

|                                     |         |
|-------------------------------------|---------|
| Combustibility class housing (UL94) | V-0     |
| Material housing                    | Plastic |

Mechanical data | Mounting data

|        |         |
|--------|---------|
| Height | 20 mm   |
| Width  | 11,5 mm |
| Depth  | 7,5 mm  |

Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |