

ALLEN-BRADLEY CONTACTOR SUPPRESSOR

Varistor, 240VAC/DC



230 V AC/DC

VDR

For other configurations and voltages, please inquire.

[Linkki tuotteeseen](#)

Kuvat

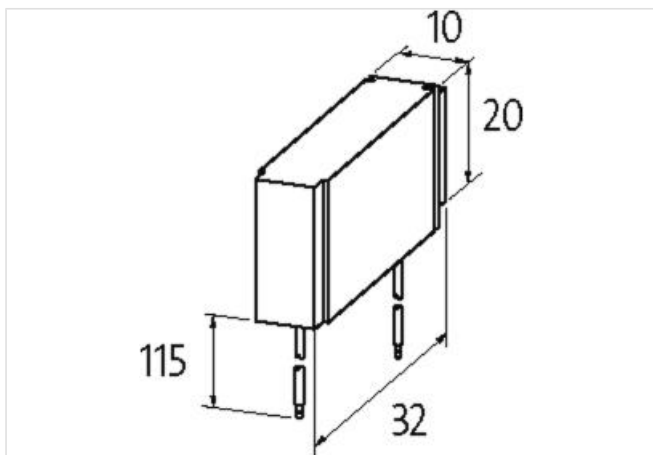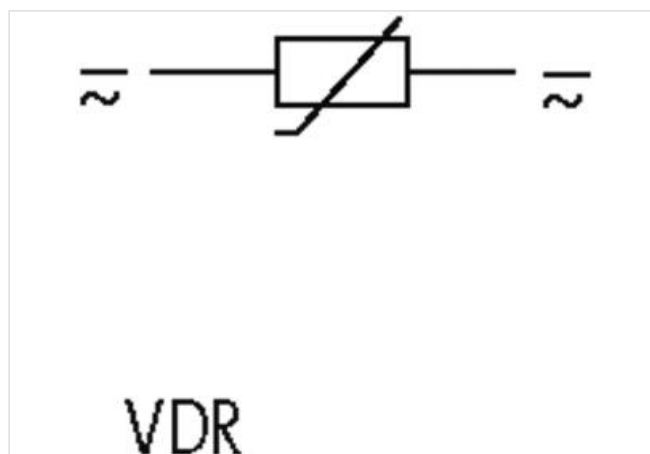

Tuote voi erota kuvassa olevasta



Kaupalliset tiedot

ECLASS-6.0	27371013
GTIN	4048879292894
Pakkauskoko	1
Tullinumero	85363010

Compatibility | Compatible with

Appropriate contactors	100-M
------------------------	-------

Electrical data

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.
Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 17.04.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

Damping factor	1.5× UN
Electrical data Input	
Input voltage AC min.	110 V
Input voltage AC max.	250 V
Input voltage DC min.	110 V
Input voltage DC max.	250 V
Installation Connection	
Connection information	flexible connection wires
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Mechanical data Mounting data	
Height	20 mm
Width	10 mm
Depth	32 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	70 °C