

MVP12-V, 6XM12, 4POLE, M23 12POL. CON.

Connector exit frontside

6-way, 4-pole

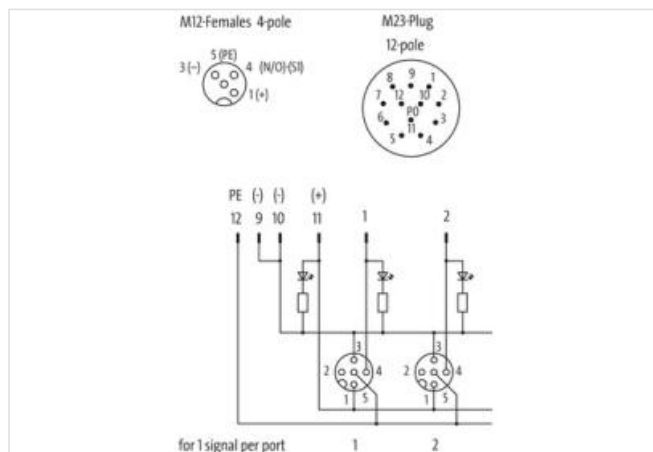
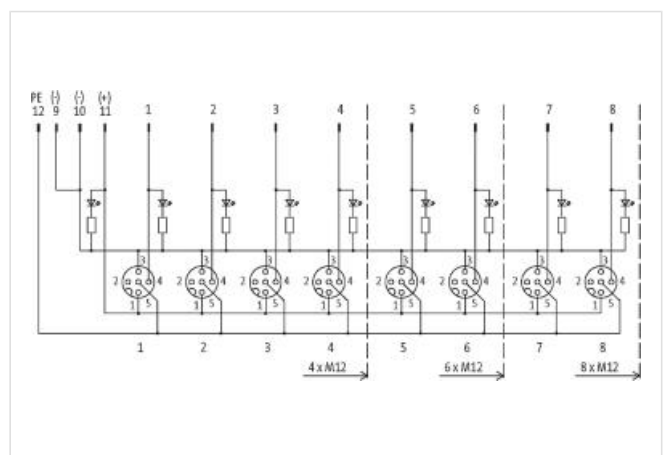
M23 plug connection

12-pole used

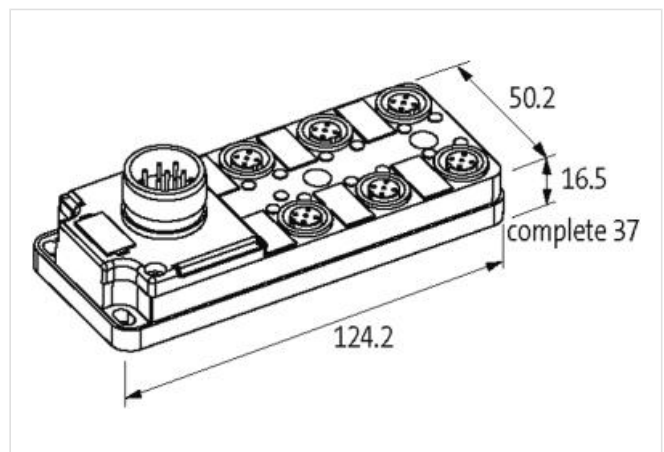
with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27279219
ECLASS-6.1	27279219
ECLASS-7.0	27279219

ECLASS-8.0	27279219
ECLASS-9.0	27440108
ECLASS-10.1	27440111
ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
GTIN	4048879063388
Pakkauskoko	1
Tullinumero	85369010

Electrical data | Supply

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A

Industrial communication

Number of signals per port	1
----------------------------	---

Installation | Connection

Mounting set	M12 x 1
--------------	---------

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	screwed, mounted

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Material housing	Plastic
------------------	---------

Mechanical data | Mounting data

Mounting method	Schraubgewinde
Height	124,2 mm
Width	50,2 mm
Depth	16,5 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	80 °C

Connection type 1

Family construction form	M23
Gender	male
Color contact carrier	black
Coding	A
No. of poles	12
PIN 1	WH
PIN 2	GN
PIN 3	YE
PIN 4	GY
PIN 5	PK
PIN 6	RD
PIN 7	BK
PIN 8	VT
PIN 9	BU
PIN 10	BU
PIN 11	BN
PIN 12	YE / GN