

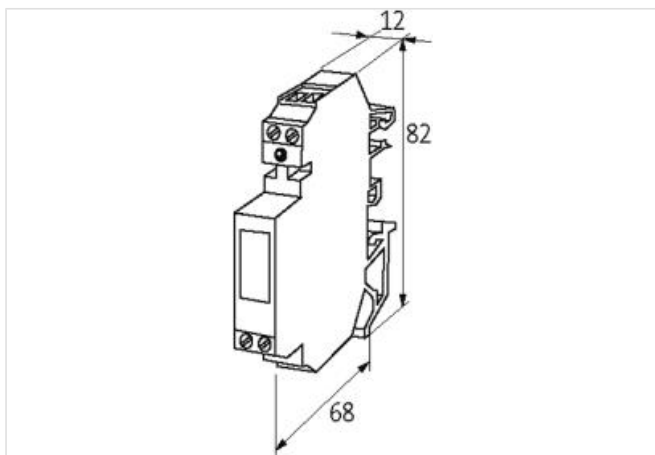
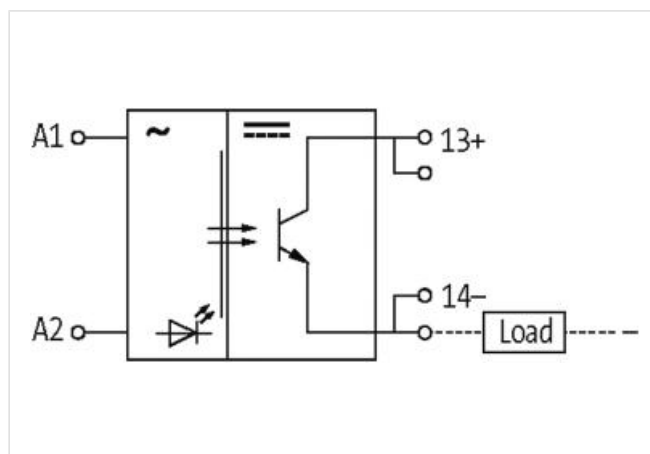
EMMDS 30-64/0,1 OPTO-COUPLER MODULE

IN: 230 VAC - OUT: 40 VDC / 0,1 A

Transistor 0.1 A

230 V AC

Double terminals on the output side

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27371604
ECLASS-6.1	27371604
ECLASS-7.0	27371604
ECLASS-8.0	27371604
ECLASS-9.0	27371604
ECLASS-10.1	27371604

ECLASS-11.1	27371604
ECLASS-12.0	27371604
ETIM-5.0	EC001504
GTIN	4048879027939
Pakkauskoko	1
Tullinumero	85414900

Electrical data | Input

Input voltage AC min.	195 V
Input voltage AC max.	253 V
Input voltage OFF AC min.	0 V
Input voltage OFF AC max.	110 V
Input current	7,5 mA

Electrical data | Output

Switch off delay max.	120 ms
Switch on delay max.	50 ms
Quiescent current OFF max.	0,3 mA
Switching frequency inductive max.	1 Hz
Switching frequency ohmic max.	10 Hz
Voltage switching DC min.	4 V
Switching voltage DC max.	40 V
Switching current min.	1 mA
Switching current max.	0,1 A
Voltage drop DC max.	1,2 V

Diagnostics

Status indication LED	red
-----------------------	-----

Device protection | Electrical

Rated insulation voltage	3750 V
--------------------------	--------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Color housing	black
Material housing	Plastic

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)
Height	82 mm
Width	12 mm
Depth	64 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C