

DC-MOTOR COMMUTATING CIRCUIT

IN: 24 VDC - OUT: 24 VDC / 3 A

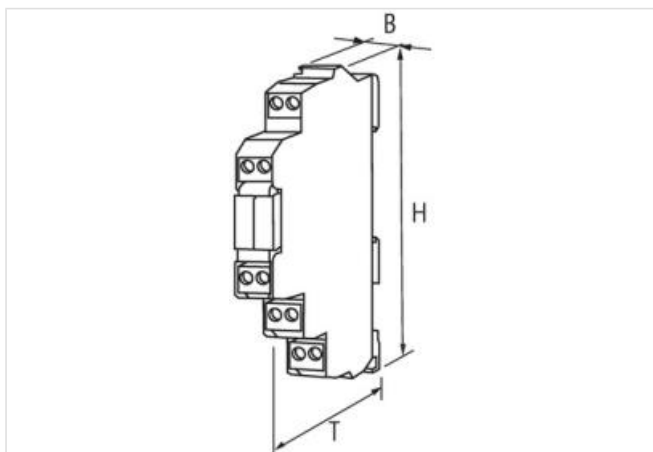
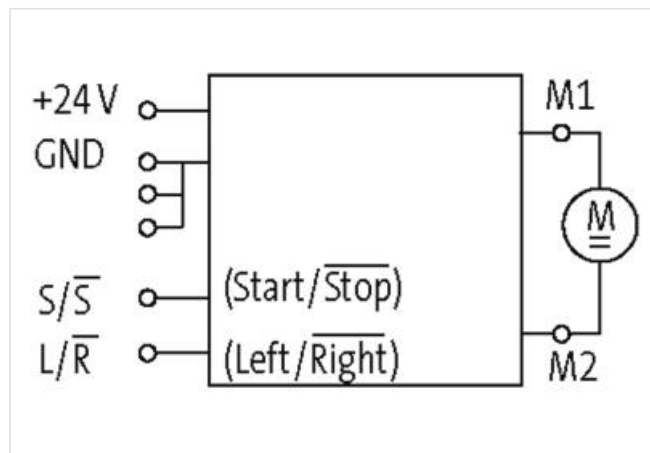
Transistor 3 A

24 V DC

Screw terminals

Start-stop/left-right (active stop mode)

Over current / temperature monitoring

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27371604
ECLASS-6.1	27370905
ECLASS-7.0	27370905
ECLASS-8.0	27370905
ECLASS-9.0	27370905

ECLASS-10.1	27370905
ECLASS-11.1	27370905
ECLASS-12.0	27370905
ETIM-5.0	EC002615
GTIN	4048879027922
Pakkauskoko	1
Tullinumero	85414900
Electrical data Input	
Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	5 V
Input voltage DC min.	15 V
Input voltage DC max.	30 V
Input current	10 mA
Electrical data Output	
Switch off delay max.	10 ms
Switch on delay max.	1,2 ms
Quiescent current OFF max.	10 mA
Additional condition switching frequency	engine dependent
Switching frequency max.	1 Hz
Voltage switching DC min.	19,2 V
Switching voltage DC max.	30 V
Switching current max.	3 A
Voltage drop DC max.	1,4 V
Highest current 100 ms	6 A
Turnaround time max.	50 ms
Diagnostics	
Status indication LED	green, yellow
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Color housing	black
Material housing	Plastic
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)
Height	90 mm
Width	12,4 mm
Depth	70 mm
Environmental characteristics Climatic	
Operating temperature min.	0 °C
Operating temperature max.	50 °C
Connection type 4	
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	+ 24 V DC
PIN 2	0 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female

No. of poles	2
PIN 1	M 1
PIN 2	M 2
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	S / -S
PIN 2	L / -R
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	0 V
PIN 2	0 V