

Product discontinued until 31.10.2018, replaced by: 56469

Gateway Ethernet-IP/AS-i, 1 Master, Spec. 3.0, IP20

Gateway-Singlemaster

via pluggable spring clamp plug-in terminals on the front 0.5...1.5 mm²

AS-Interface/EtherNet/IP

Specification 3.0

Current manuals, GSD/type data can be downloaded at: www.murrelektronik.com


Other gateways on request.

Linkki tuotteeseen

Kuvat



Tuote voi erota kuvassa olevasta

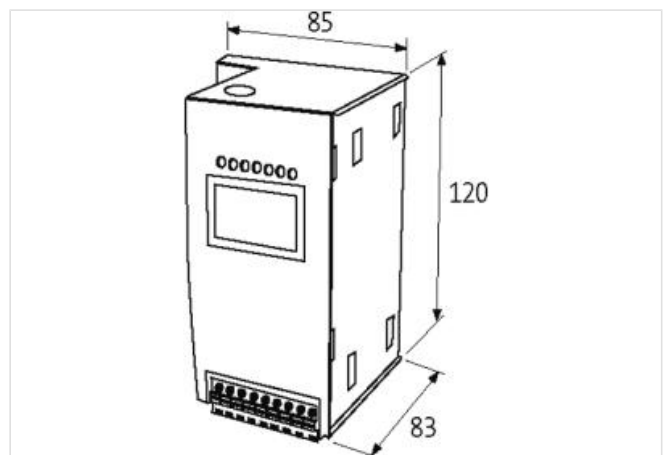

Kaupalliset tiedot

ECLASS-6.0	27242208
ECLASS-7.0	27242208
ECLASS-8.0	27242208
ECLASS-9.0	27242208
ETIM-5.0	EC001604
GTIN	4048879495707
Pakkauskoko	1
Tullinumero	85176200

Electrical data

Rated operating current AS-Interface max.	200 mA
---	--------

Electrical data | Supply

Operating voltage DC	30 V
----------------------	------

Industrial communication

Supported protocol	EtherNet/IP
--------------------	-------------

Industrial communication | AS-Interface

AS-i specification	V3.0
Number of slaves max.	62
Diagnostic interface serial	RJ45/Fieldbus or PS2/RS232

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.
Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 19.04.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

Cycle time AS-i 150 µs × (number of slaves + 2)

Installation | Connection

Family construction form RJ45

Device protection | Electrical

Degree of protection (EN IEC 60529) IP20
Rated insulation voltage 500 V

Mechanical data | Mounting data

Mounting method geschnappt
Suitable for mounting type mounting rail, (EN 60715)
Height 120 mm
Width 85 mm
Depth 83 mm

Environmental characteristics | Climatic

Operating temperature min. 0 °C
Operating temperature max. 55 °C
Storage temperature min. -25 °C
Storage temperature max. 85 °C

Conformity

Low Voltage Directive EN 50295