

Gateway CC-Link/AS-i, 1 Master, P24

Spec. 3.0, Power 24

AS-Interface/CC-Link

Power 24V

Specification 3.0

Current manuals, GSD/type data can be downloaded at: www.murrelektronik.com

Other gateways on request.

Gateway-Singlemaster


AS-Interface data decoupling integrated

AS-Interface duplicate address detection

AS-Interface EMC detector integrated

[Linkki tuotteeseen](#)

Kuvat

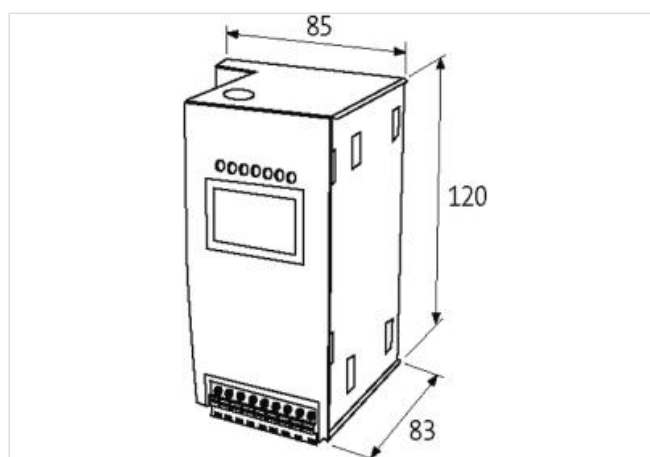

Tuote voi erota kuvassa olevasta



Kaupalliset tiedot

ECLASS-6.0	27242608
ECLASS-6.1	27242608
ECLASS-7.0	27242608
ECLASS-8.0	27242608
ECLASS-9.0	27242608
ECLASS-10.1	27242608
ECLASS-11.1	27242608
ECLASS-12.0	27242608
ETIM-5.0	EC001604
GTIN	4048879661683
Pakkauskoko	1
Tullinumero	85176200

Electrical data

Rated operating current AS-Interface max.	250 mA
Security level	PELV

Electrical data | Supply

Operating voltage DC	24 V
----------------------	------

Operating voltage DC min.	20 V
---------------------------	------

Operating voltage DC max.	30,6 V
---------------------------	--------

Industrial communication

Supported protocol	CC-Link
--------------------	---------

Industrial communication | Bus data

Automatic baudrate detection	no
------------------------------	----

Baud rate min.	156 kBaud
----------------	-----------

Baud rate max.	10 MBaud
----------------	----------

Industrial communication | AS-Interface

AS-i specification	V3.0
--------------------	------

Number of slaves max.	62
-----------------------	----

Diagnostic interface serial	None
-----------------------------	------

Cycle time AS-i	150 μ s $\times$ (number of slaves + 2)
-----------------	---

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

Rated insulation voltage	500 V
--------------------------	-------

Mechanical data | Mounting data

Mounting method	geschnappt
-----------------	------------

Suitable for mounting type	mounting rail, (EN 60715)
----------------------------	---------------------------

Height	120 mm
--------	--------

Width	85 mm
-------	-------

Depth	83 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	0 °C
----------------------------	------

Operating temperature max.	55 °C
----------------------------	-------

Storage temperature min.	-25 °C
--------------------------	--------

Storage temperature max.	85 °C
--------------------------	-------

Conformity

Product standard	EN 61131-2, EN 62026-2
------------------	------------------------