

CUBE20S POTENTIAL DISTRIBUTORS

8 x 0 V DC


Potential distributor  
Expansion module  
8x 0 V DC

[Linkki tuotteeseen](#)

Kuvat



Tuote voi erota kuvassa olevasta

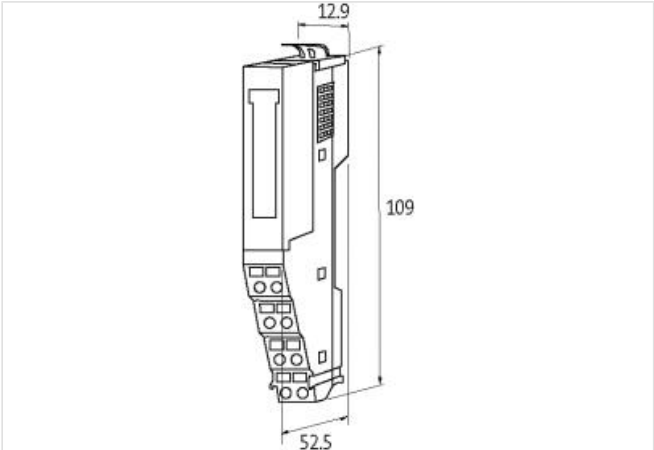

| Kaupalliset tiedot                  |                           |
|-------------------------------------|---------------------------|
| ECLASS-6.0                          | 27379201                  |
| ECLASS-6.1                          | 27242611                  |
| ECLASS-7.0                          | 27242611                  |
| ECLASS-8.0                          | 27242611                  |
| ECLASS-9.0                          | 27242611                  |
| ECLASS-10.1                         | 27242611                  |
| ECLASS-11.1                         | 27242611                  |
| ECLASS-12.0                         | 27242611                  |
| ETIM-5.0                            | EC001600                  |
| GTIN                                | 4048879422864             |
| Pakkauskoko                         | 1                         |
| Tullinumero                         | 85369010                  |
| Electrical data   Supply            |                           |
| Operating voltage DC max.           | 0 V                       |
| Total current max.                  | 10 A                      |
| Device protection   Electrical      |                           |
| Degree of protection (EN IEC 60529) | IP20                      |
| Mechanical data   Mounting data     |                           |
| Mounting method                     | geschnappt                |
| Suitable for mounting type          | mounting rail, (EN 60715) |
| Height                              | 109 mm                    |

|                                          |                           |
|------------------------------------------|---------------------------|
| Width                                    | 12,9 mm                   |
| Depth                                    | 52,5 mm                   |
| Environmental characteristics   Climatic |                           |
| Operating temperature min.               | 0 °C                      |
| Operating temperature max.               | 60 °C                     |
| Storage temperature min.                 | -25 °C                    |
| Storage temperature max.                 | 70 °C                     |
| Connection type 2                        |                           |
| Connection type 1                        | Power                     |
| Connection type 2                        | Power                     |
| Connection                               | Spring clamp terminals FK |
| Family construction form                 | terminal                  |
| Gender                                   | female                    |
| No. of poles                             | 8                         |
| PIN 1                                    | n.c.                      |
| PIN 2                                    | 24 V DC                   |
| PIN 3                                    | 0 V                       |
| PIN 4                                    | 24 V DC Sys               |
| PIN 5                                    | n.c.                      |
| PIN 6                                    | 24 V DC                   |
| PIN 7                                    | 0 V                       |
| PIN 8                                    | 0 V Sys                   |
| Connection                               | Spring clamp terminals FK |
| Family construction form                 | terminal                  |
| Gender                                   | female                    |
| No. of poles                             | 8                         |
| PIN 1                                    | 0 V DC                    |
| PIN 2                                    | 0 V DC                    |
| PIN 3                                    | 0 V DC                    |
| PIN 4                                    | 0 V DC                    |
| PIN 5                                    | 0 V DC                    |
| PIN 6                                    | 0 V DC                    |
| PIN 7                                    | 0 V DC                    |
| PIN 8                                    | 0 V DC                    |