

CUBE20S DIGITAL INPUT MODULE DI8

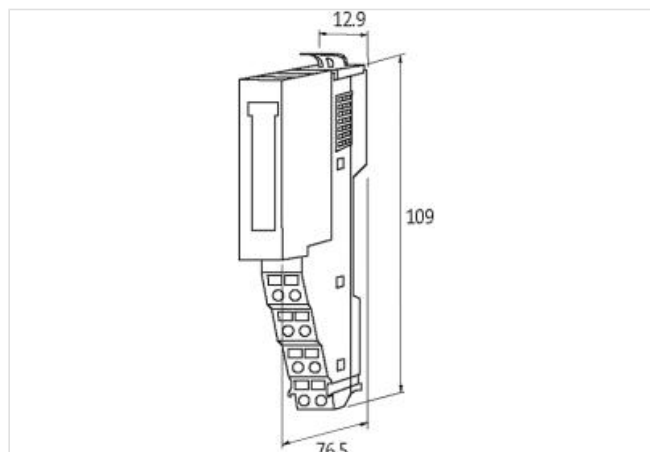
8x24VDC

Expansion module

DI8 - (E)

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27242604
ECLASS-6.1	27242604
ECLASS-7.0	27242604
ECLASS-8.0	27242604
ECLASS-9.0	27242604
ECLASS-10.1	27242604
ECLASS-11.1	27242604
ECLASS-12.0	27242604
ETIM-5.0	EC001599
GTIN	4048879424059
Pakkauskoko	1
Tullinumero	85389099

Electrical data | Supply

Norm operating voltage	EN 61131-2
Operating voltage US DC	24 V
Current consumption max.	60 mA
module supply	via system connection

Electrical data | Input

Type input	PNP (EN 61131-2)
Input filter time	3 ms
Current carrying capacity max.	0,5 A

Diagnostics

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.

Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 20.04.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

Diagnostic	No voltage
Diagnostic via BUS	per module
Diagnostic via LED	per module and channel
Short circuit diagnosis	yes
LED display	Ethernet connection/data traffic
Overload diagnosis	yes
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20
Galvanic separation (operating voltage)	yes
Galvanic separation input/input	yes
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	109 mm
Width	12,9 mm
Depth	76,5 mm
Environmental characteristics Climatic	
Operating temperature min.	0 °C
Operating temperature max.	60 °C
Storage temperature min.	-20 °C
Storage temperature max.	70 °C
Connection type 2	
Connection type 1	Power
Connection type 2	Power
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
No. of poles	8
PIN 1	n.c.
PIN 2	24 V DC
PIN 3	0 V
PIN 4	24 V DC Sys
PIN 5	n.c.
PIN 6	24 V DC
PIN 7	0 V
PIN 8	0 V Sys
Connection	Spring clamp terminals FK
Family construction form	terminal
Gender	female
No. of poles	8
PIN 1	DI 0
PIN 2	DI 2
PIN 3	DI 4
PIN 4	DI 6
PIN 5	DI 1
PIN 6	DI 3
PIN 7	DI 5
PIN 8	DI 7