


## Xenterra 8TX unmanaged Switch 8 Port 1000Mbit wall mounting

8 Port Unamanged IP20 Gigabit Switch  
Wall mounting

### [Linkki tuotteeseen](#)

#### Kuvat

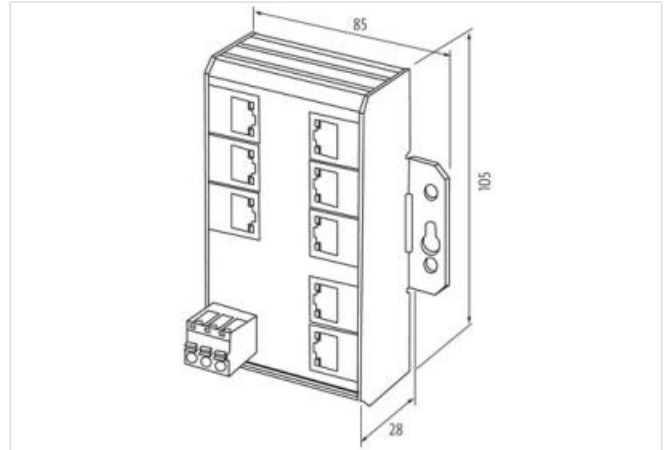

Tuote voi erota kuvassa olevasta



#### Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.1  | 19170106      |
| ECLASS-7.0  | 19170106      |
| ECLASS-8.0  | 19170106      |
| ECLASS-9.0  | 19170402      |
| ECLASS-10.1 | 19170402      |
| ECLASS-11.1 | 19170402      |
| ECLASS-12.0 | 19170402      |
| GTIN        | 4048879873550 |
| Pakkauskoko | 1             |
| Tullinumero | 85176200      |

#### Electrical data | Supply

|                           |      |
|---------------------------|------|
| Operating voltage AC min. | 8 V  |
| Operating voltage AC max. | 28 V |
| Operating voltage DC min. | 9 V  |
| Operating voltage DC max. | 36 V |

#### Industrial communication

|                             |             |
|-----------------------------|-------------|
| Data transmission rate max. | 1000 MBit/s |
|-----------------------------|-------------|

#### Industrial communication | Ethernet functionality

|                              |             |
|------------------------------|-------------|
| Auto-crossover               | yes         |
| Auto-negotiation             | yes         |
| duplex                       | Full duplex |
| Switch type                  | unmanaged   |
| VLAN unmanaged (IEEE 802.1Q) | yes         |

| Diagnostics                              |                                  |
|------------------------------------------|----------------------------------|
| Alarm contact                            | no                               |
| Diagnostic                               | No voltage                       |
| LED display                              | Ethernet connection/data traffic |
| Device protection   Electrical           |                                  |
| Degree of protection (EN IEC 60529)      | IP20                             |
| Mechanical data   Material data          |                                  |
| Color housing                            | black                            |
| Material housing                         | Metal                            |
| Mechanical data   Mounting data          |                                  |
| Mounting method                          | screwed                          |
| Suitable for mounting type               | Schlüssellochabhängung           |
| Height                                   | 105 mm                           |
| Width                                    | 85 mm                            |
| Depth                                    | 28 mm                            |
| Environmental characteristics   Climatic |                                  |
| Operating temperature min.               | -40 °C                           |
| Operating temperature max.               | 70 °C                            |
| Storage temperature min.                 | -40 °C                           |
| Storage temperature max.                 | 85 °C                            |
| Connection type 1                        |                                  |
| Connection type 1                        | 8                                |
| Family construction form                 | RJ45                             |
| Gender                                   | female                           |
| Color contact carrier                    | black                            |
| No. of poles                             | 8                                |
| PIN 1                                    | TD +                             |
| PIN 2                                    | TD -                             |
| PIN 3                                    | RD +                             |
| PIN 4                                    | n.c.                             |
| PIN 5                                    | n.c.                             |
| PIN 6                                    | RD -                             |
| PIN 7                                    | n.c.                             |
| PIN 8                                    | n.c.                             |