

MSVD POWER SOCKET NEMA (GFCI)

Mounting rail

USA (2× NEMA-GFCI 5-15)

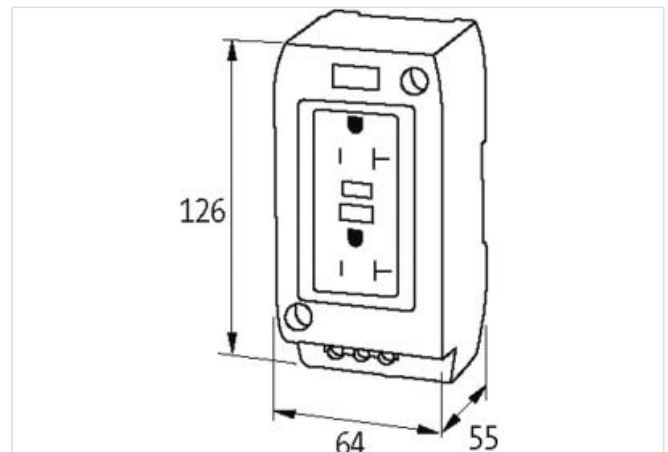
(Ground Fault Circuit Interrupter)

Screw terminals

Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27189217
ECLASS-6.1	27142305
ECLASS-7.0	27142305
ECLASS-8.0	27142305
ECLASS-9.0	27142305
ECLASS-10.1	27142305
ECLASS-11.1	27142305
ECLASS-12.0	27142305
ETIM-5.0	EC000020
GTIN	4048879041393
Pakkauskoko	1
Tullinumero	85366990

Electrical data

Fault current min.	4 mA
Fault current max.	6 mA

Electrical data | Supply

Operating voltage AC	125 V
Operating current max.	15 A

Installation

Connection cross section max.	6 mm ²
-------------------------------	-------------------

Installation | Connection

Connection	Screw terminals SK
------------	--------------------

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)
Height	126 mm
Width	64 mm
Depth	55 mm