

## MSVD POWER SOCKET NEMA (GFCI)

Mounting rail

USA (2× NEMA-GFCI 5-20)

(Ground Fault Circuit Interrupter)

Screw terminals


Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

### Linkki tuotteeseen

#### Kuvat



Tuote voi erota kuvassa olevasta

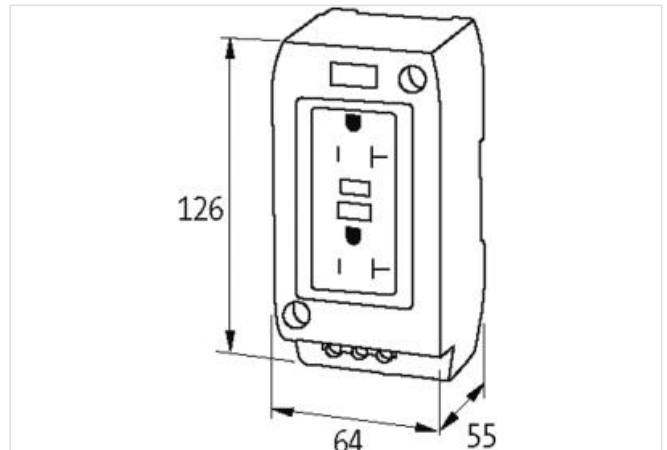

#### Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27189217      |
| ECLASS-6.1  | 27142305      |
| ECLASS-7.0  | 27142305      |
| ECLASS-8.0  | 27142305      |
| ECLASS-9.0  | 27142305      |
| ECLASS-10.1 | 27142305      |
| ECLASS-11.1 | 27142305      |
| ECLASS-12.0 | 27142305      |
| ETIM-5.0    | EC000020      |
| GTIN        | 4048879041386 |
| Pakkauskoko | 1             |
| Tullinumero | 85366990      |

#### Electrical data

|                    |      |
|--------------------|------|
| Fault current min. | 4 mA |
| Fault current max. | 6 mA |

#### Electrical data | Supply

|                        |       |
|------------------------|-------|
| Operating voltage AC   | 125 V |
| Operating current max. | 20 A  |

#### Installation

|                               |                   |
|-------------------------------|-------------------|
| Connection cross section max. | 6 mm <sup>2</sup> |
|-------------------------------|-------------------|

Connection Screw terminals SK

|                            |                           |
|----------------------------|---------------------------|
| Mounting method            | geschnappt                |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height                     | 126 mm                    |
| Width                      | 64 mm                     |
| Depth                      | 55 mm                     |