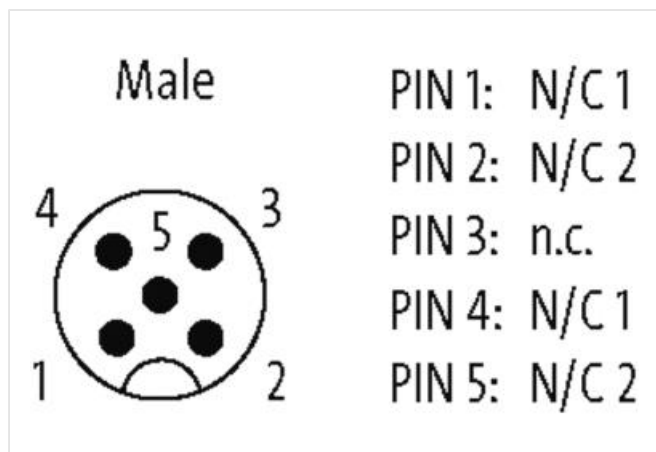
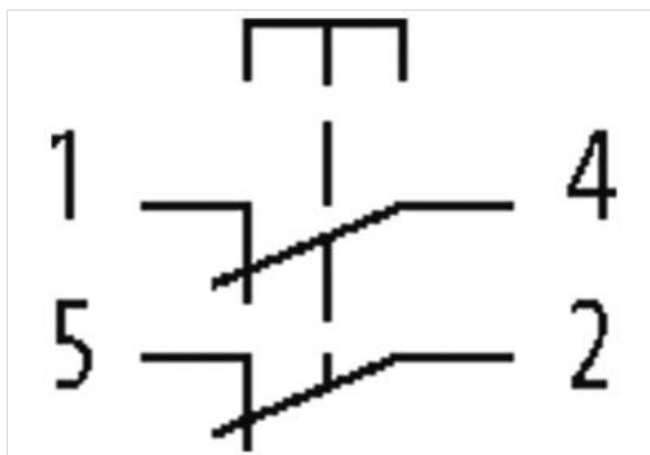



**Emergency-stop pushbutton with 2 positive opening contacts**

in a IP65 enclosure

E-Stop 72P 2NC M12(5)  
 with M12 connection  
 5-pole  
 Emergency-Stop button  
 2 NC (positively-opening)  
 with protection shroud

[Linkki tuotteeseen](#)
**Kuvat**


Tuote voi erota kuvassa olevasta

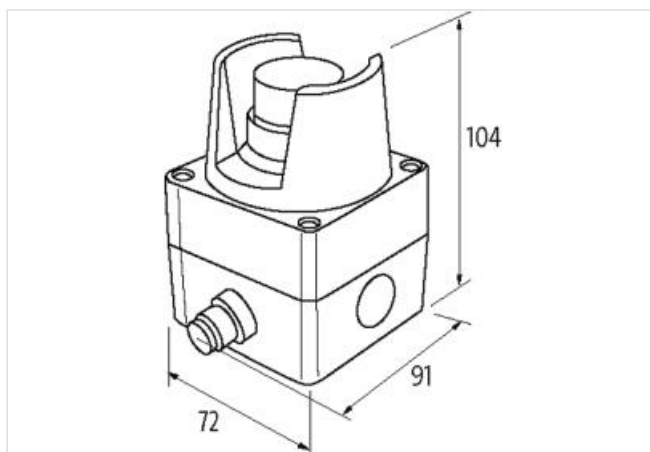
**Kaupalliset tiedot**

|            |          |
|------------|----------|
| ECLASS-6.0 | 27371244 |
| ECLASS-6.1 | 27371244 |
| ECLASS-7.0 | 27371244 |
| ECLASS-8.0 | 27371244 |

|             |               |
|-------------|---------------|
| ECLASS-9.0  | 27371244      |
| ECLASS-10.1 | 27371244      |
| ECLASS-11.1 | 27371244      |
| ECLASS-12.0 | 27371244      |
| ETIM-5.0    | EC002034      |
| GTIN        | 4048879594691 |
| Pakkauskoko | 1             |
| Tullinumero | 85365080      |

#### Electrical data | Output

|                                               |             |
|-----------------------------------------------|-------------|
| Utilization category AC-15 (EN IEC 60947-5-1) | 3 A @ 250 V |
| Utilization category DC-13 (EN IEC 60947-5-1) | 2 A @ 24 V  |
| Switching current (AC-15)                     | 30 A        |
| Switching current (DC-13)                     | 2,2 A       |

#### Device protection

|                    |                                       |
|--------------------|---------------------------------------|
| Condition lifetime | load-dependent, temperature dependent |
|--------------------|---------------------------------------|

#### Device protection | Electrical

|                                     |                |
|-------------------------------------|----------------|
| Degree of protection (EN IEC 60529) | IP65           |
| Electrical lifetime                 | 1000000 Cycles |

#### Device protection | Mechanical

|                      |                |
|----------------------|----------------|
| Mechanical endurance | 1000000 Cycles |
| Operating life B10d  | 250000 Cycles  |

#### Mechanical data

|                  |      |
|------------------|------|
| Bounce time max. | 9 ms |
|------------------|------|

#### Mechanical data | Material data

|                  |      |
|------------------|------|
| Material contact | AgNi |
|------------------|------|

#### Mechanical data | Mounting data

|                 |         |
|-----------------|---------|
| Mounting method | screwed |
| Height          | 104 mm  |
| Width           | 72 mm   |
| Depth           | 91 mm   |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 60 °C  |
| Storage temperature min.   | -25 °C |
| Storage temperature max.   | 85 °C  |

#### Technical Data | Reliability

|                                |      |
|--------------------------------|------|
| Lambda normally closed contact | 20 % |
|--------------------------------|------|

#### Connection type 1

|                          |       |
|--------------------------|-------|
| Family construction form | M12   |
| Gender                   | male  |
| Color contact carrier    | black |
| Coding                   | A     |
| No. of poles             | 5     |
| PIN 1                    | NC 1  |
| PIN 2                    | NC 2  |
| PIN 4                    | NC 1  |
| PIN 5                    | NC 2  |