

**LED-INDICATOR OPAC / GREEN**

LED-24V IP65

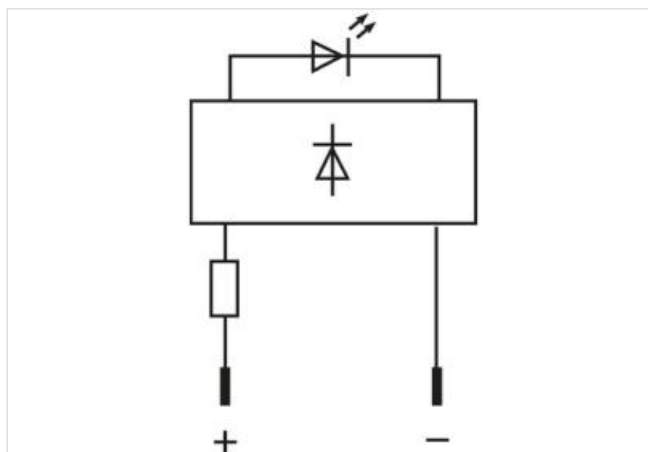
(green)

24 V AC/DC

The modules are suitable for wall thickness of 1.5...5.0 mm.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27261590      |
| ECLASS-6.1  | 27261501      |
| ECLASS-7.0  | 27261501      |
| ECLASS-8.0  | 27261501      |
| ECLASS-9.0  | 27261501      |
| ECLASS-10.1 | 27261501      |
| ECLASS-11.1 | 27261501      |
| ECLASS-12.0 | 27261501      |
| ETIM-5.0    | EC000272      |
| GTIN        | 4048879041270 |
| Pakkauskoko | 10            |
| Tullinumero | 85318070      |

**Electrical data | Supply**

|                           |        |
|---------------------------|--------|
| Operating voltage AC      | 24 V   |
| Operating voltage AC min. | 20,4 V |
| Operating voltage AC max. | 26,4 V |
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 20,4 V |
| Operating voltage DC max. | 26,4 V |
| Current consumption min.  | 8 mA   |
| Current consumption max.  | 12 mA  |

**Installation | Connection**

|                        |                   |
|------------------------|-------------------|
| Connection information | Faston 2.8×0.8 mm |
|------------------------|-------------------|

**Device protection | Electrical**

|                                     |      |
|-------------------------------------|------|
| Degree of protection (EN IEC 60529) | IP65 |
|-------------------------------------|------|

Flame resistance flame retardant

|              |      |
|--------------|------|
| Diameter LED | 5 mm |
|--------------|------|

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

|                               |      |
|-------------------------------|------|
| Diameter front panel drilling | 9 mm |
|-------------------------------|------|

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
|----------------------------|--------|

|                            |       |
|----------------------------|-------|
| Operating temperature max. | 50 °C |
|----------------------------|-------|