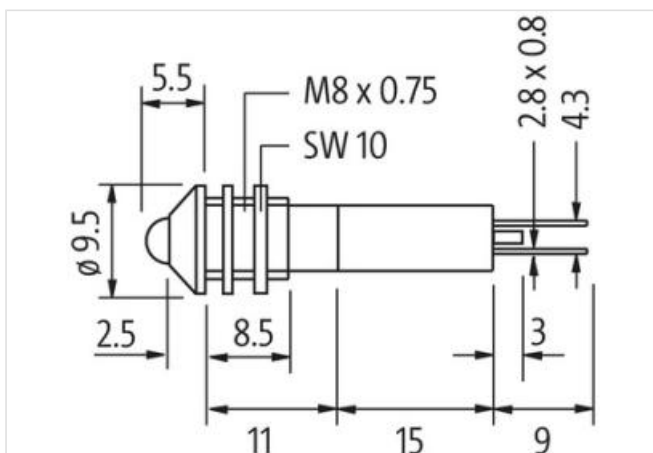
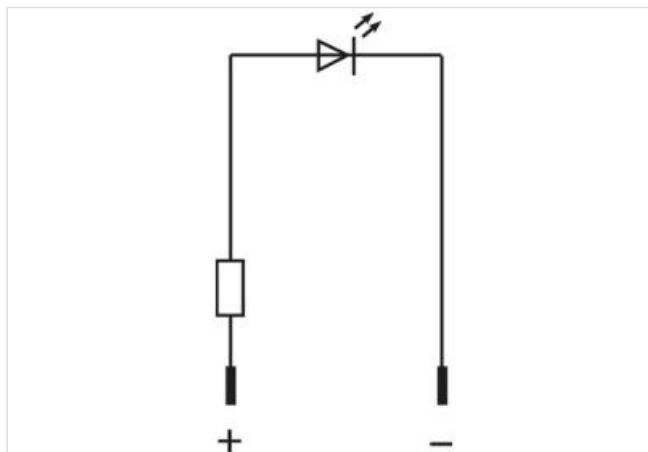


**LED-INDICATOR WHITE**

LED 5mm - 24V DC - IP40

(white)  
24 V DC[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27261590      |
| ECLASS-6.1  | 27261501      |
| ECLASS-7.0  | 27261501      |
| ECLASS-8.0  | 27261501      |
| ECLASS-9.0  | 27261501      |
| ECLASS-10.1 | 27261501      |
| ECLASS-11.1 | 27261501      |
| ECLASS-12.0 | 27261501      |
| ETIM-5.0    | EC000272      |
| GTIN        | 4048879041072 |
| Pakkauskoko | 10            |
| Tullinumero | 85318070      |

**Electrical data | Supply**

|                           |        |
|---------------------------|--------|
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 20,4 V |
| Operating voltage DC max. | 26,4 V |
| Current consumption max.  | 0,9 mA |

**Installation | Connection**

|                        |                   |
|------------------------|-------------------|
| Connection information | Faston 2.8×0.8 mm |
|------------------------|-------------------|

**Mechanical data | Material data**

|                  |               |
|------------------|---------------|
| Coating housing  | chrome-plated |
| Material housing | Brass         |

**Mechanical data | Mounting data**

|        |         |
|--------|---------|
| Height | 9,5 mm  |
| Width  | 9,5 mm  |
| Depth  | 77,5 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 70 °C  |