



MTPS POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/1ADC

The MTPS series comprises single-/two-phase power supplies/rectified power supply units, incorporating safety isolating transformers, with protection class I and protection degree IP20 for general use in industrial applications.

Linkki tuotteeseen

Kuvat

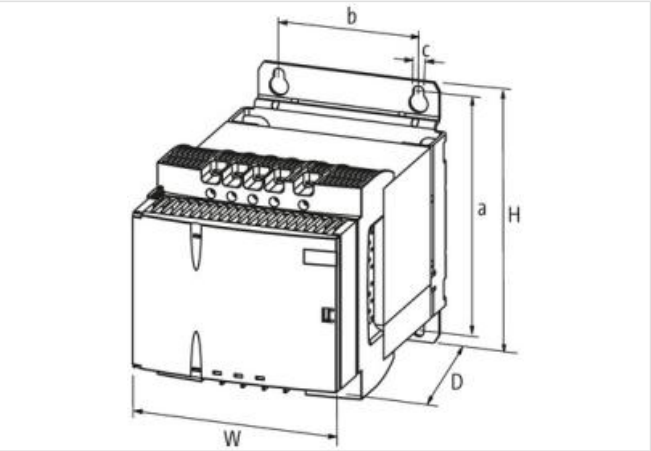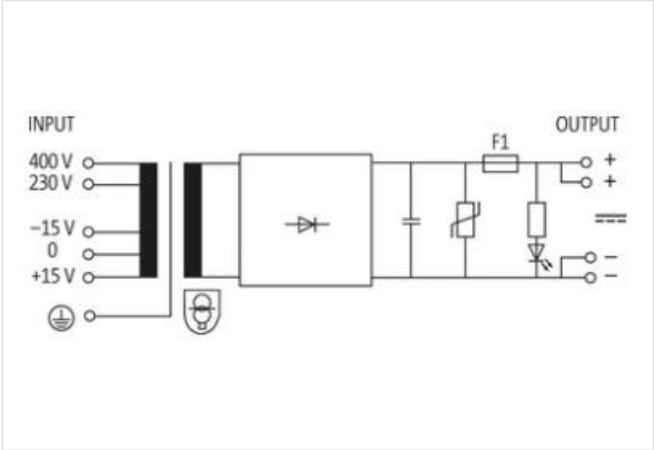

Tuote voi erota kuvassa olevasta



Kaupalliset tiedot	
ECLASS-6.0	27049002
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002
ECLASS-9.0	27040701
ECLASS-10.1	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701

ETIM-5.0	EC002540
GTIN	4048879079860
Pakkauskoko	1
Tullinumero	85044095
Electrical data	
Security level	SELV
Electrical data Supply	
Power frequency	50 ... 60 Hz
Electrical data Input	
Fuse protection 1 primary side external	0,2 A @230 V AC
Fuse protection 2 primary side external	0,15 A @400 V AC
Characteristic back-up fuse	Inertia
Input voltage 1 AC	230 V
Input voltage 1 AC min.	195,5 V
Input voltage 1 AC max.	264,5 V
Input voltage 2 AC	400 V
Input voltage 2 AC min.	340 V
Input voltage 2 AC max.	460 V
Input current at input voltage 1 AC	0,16 A
Input current at input voltage 2 AC	0,11 A
Electrical data Output	
Fuse protection secondary side external	1 A
Output suppression	LED, Screening capacitor, VDR
Output voltage DC	24 V
Output voltage adjustable	no
Output current max.	1 A
Characteristic secondary fuse	Inertia
Ripple max.	5 %
Diagnostics	
Status indication LED	green
Mechanical data Mounting data	
Mounting method	geschnappt
Suitable for mounting type	Tragschiene TH35-15, Schlüsselochaufhängung, (EN 60715)
Mounting dimension a	96 mm
Mounting dimension b	60 mm
Mounting dimension c	5,5 mm
Height	108 mm
Width	87 mm
Depth	124 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Conformity	
Product standard	EN 61558-2-6, EN 62041 category I
EMC	EN 55011 B, EN 61000-3-2
Connection type 2	
Connection type 1	Input
Connection type 2	Output
Connection	Screw terminals SK
Family construction form	terminal
Gender	female

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.
 Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 20.04.2024

No. of poles	5
PIN 1	+ 15 V
PIN 3	- 15 V
PIN 4	230 V
PIN 5	400 V
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	5
PIN 1	PE
PIN 4	24 V DC
PIN 5	24 V DC