



MTS 1-Phase safety and isolating transformer

P: 63VA IN: 230VAC +/- 15VAC OUT: 24VAC


The MST series comprises single-phase safety transformers/isolating transformers of the protection class I and protection degree IP00 with double insulation between the primary and secondary windings for general use in industrial applications.

[Linkki tuotteeseen](#)

Kuvat

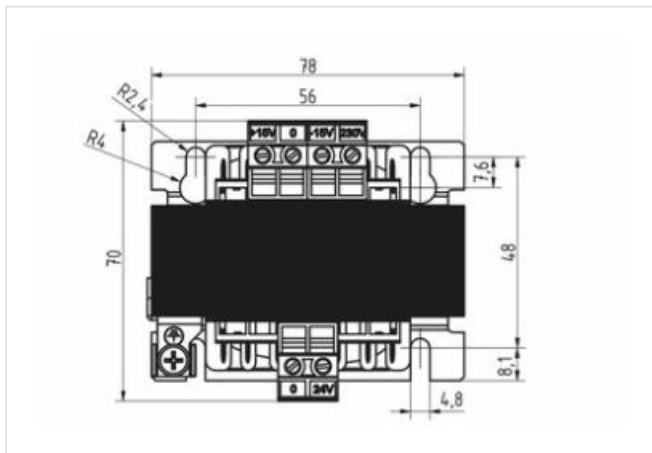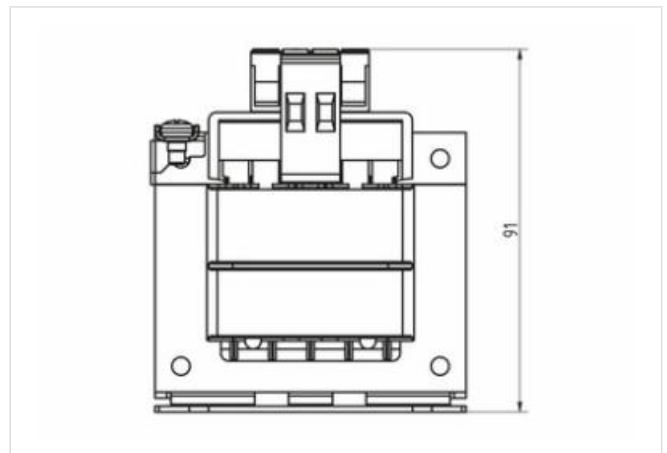

Tuote voi erota kuvassa olevasta

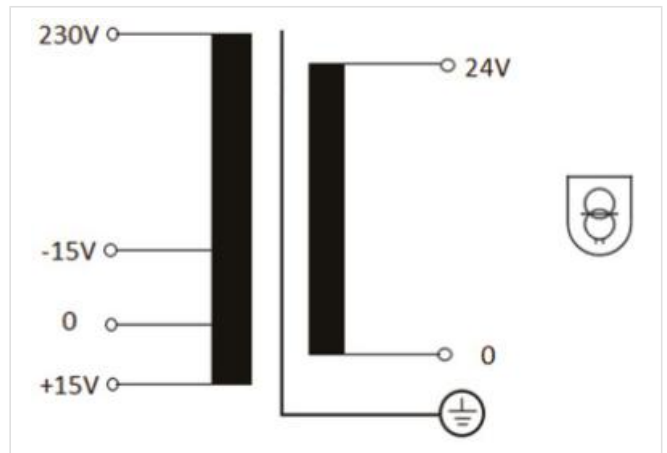

Electrical data | Supply

Power frequency 50/60 Hz

Electrical data | Input

Input voltage AC 230 V

Current input AC 0,35 A

Max. inrush current 3,8 A

Short-circuit current 3 A

Electrical data | Output

Output voltage AC	24 V
-------------------	------

Mechanical data | Mounting data

Mounting method	screwed
Suitable for mounting type	Schlüssellochabhängung
Mounting dimension a	48 mm
Mounting dimension b	56 mm
Mounting dimension c	2,4 mm
Height	70 mm
Width	78 mm
Depth	91 mm
Diameter bore	2,4 mm
Length bore	7,6 mm

Environmental characteristics | Climatic

Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU

Kaupalliset tiedot

GTIN	4065909078846
Pakkauskoko	1
Tullinumero	85043180