

M12 DISTRIBUTOR BOX 6-WAY, 5-POLE, W/O LED, CNOMO

MVD6-U-XA M23 connector 19-pole


6-way, 5-pole
M23 plug connection
19-pole used
without LED
Further cable lengths on request.

Linkki tuotteeseen

Kuvat



Tuote voi erota kuvassa olevasta

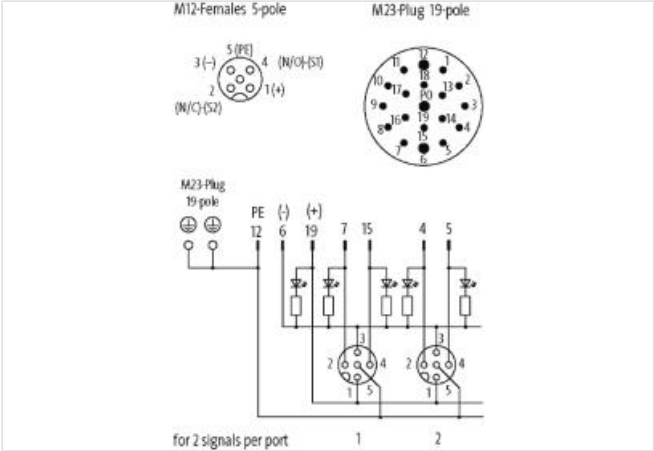

Electrical data Supply	
Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A
Industrial communication	
Number of signals per port	2
Installation Connection	
Mounting set	M12 x 1
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed
Mechanical data Mounting data	
Mounting method	Schraubgewinde
Height	127 mm
Width	54 mm
Depth	25 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	80 °C
Connection type 2	
Family construction form	M12
Gender	female
Color contact carrier	black

Coding	A
No. of poles	5
PIN 1	+
PIN 2	n.c.
PIN 3	-
PIN 4	NO
PIN 5	n.c.
Family construction form	M23
Gender	male
Color contact carrier	black
Coding	A
No. of poles	19
PIN 2	NO S 4
PIN 3	NO S 4
PIN 4	NC S 2
PIN 5	NO S 4
PIN 6	3 (-)
PIN 7	NC S 2
PIN 8	NC S 2
PIN 9	NC S 2
PIN 12	5 (PE)
PIN 13	NC S 2
PIN 14	NC S 2
PIN 15	NO S 4
PIN 16	NO S 4
PIN 19	1 (+)
Kaupalliset tiedot	
GTIN	4048879000253
Pakkauskoko	1
Tullinumero	85369010