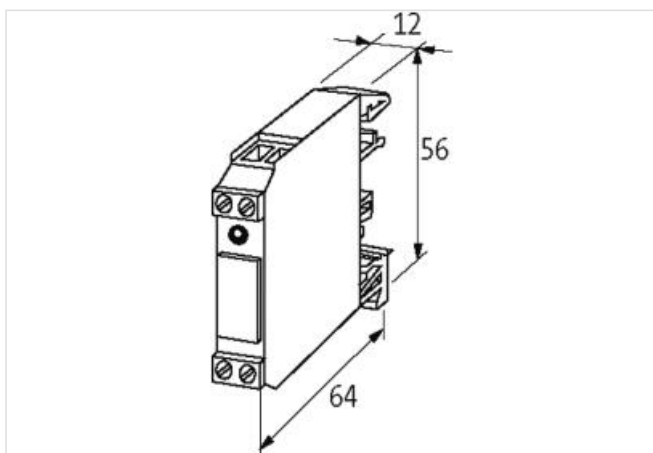
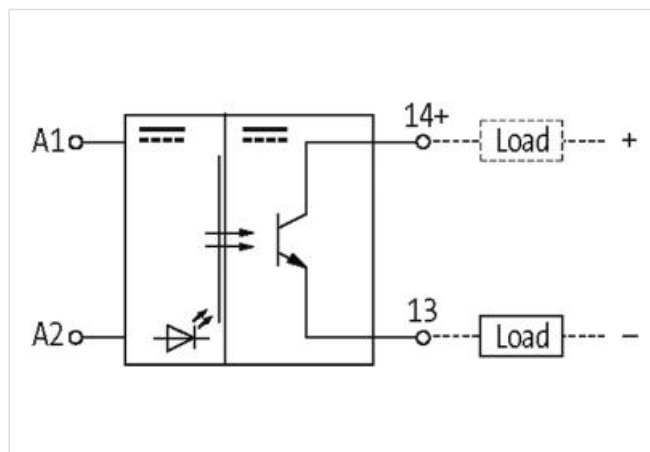


AMMS 10-44/1 OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 45 VDC / 1,2 A

Transistor 1.2 A
10...30 V DC[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Kaupalliset tiedot**

ECLASS-6.0	27371604
ECLASS-6.1	27371604
ECLASS-7.0	27371604
ECLASS-8.0	27371604
ECLASS-9.0	27371604
ECLASS-10.1	27371604
ECLASS-11.1	27371604
ECLASS-12.0	27371604

ETIM-5.0	EC001504
GTIN	4048879025041
Pakkauskoko	1
Tullinumero	85414900

Electrical data | Input

Input voltage OFF DC min.	0 V
Input voltage OFF DC max.	3 V
Input voltage DC min.	10 V
Input voltage DC max.	30 V
Input current max.	8 mA

Electrical data | Output

Switch off delay max.	65 µs
Quiescent current OFF max.	0,3 mA
Switching frequency ohmic max.	500 Hz
Voltage switching DC min.	4,5 V
Switching voltage DC max.	30 V
Switching current min.	1 mA
Switching current max.	1,2 A
Voltage drop DC max.	1,2 V

Diagnostics

Status indication LED	red
-----------------------	-----

Device protection | Electrical

Rated insulation voltage	3750 V
--------------------------	--------

Device protection | Media

Flame resistance	flame retardant
------------------	-----------------

Mechanical data | Material data

Color housing	black
Material housing	Plastic

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	mounting rail, (EN 60715)

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C

Connection type 2

Connection type 1	Input
Connection type 2	Output
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	A 1
PIN 2	A 2
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
No. of poles	2
PIN 1	13
PIN 2	+ 14