

## CUBE20 SYSTEM INTERFACE TO CUBE67

8 multifunction channels, Power M12 CUBE67

System connection


M12 Power

DIO8 - (BN) Cube67/20

Connection cables are in the online shop under "Connection Technology".

### Linkki tuotteeseen

#### Kuvat

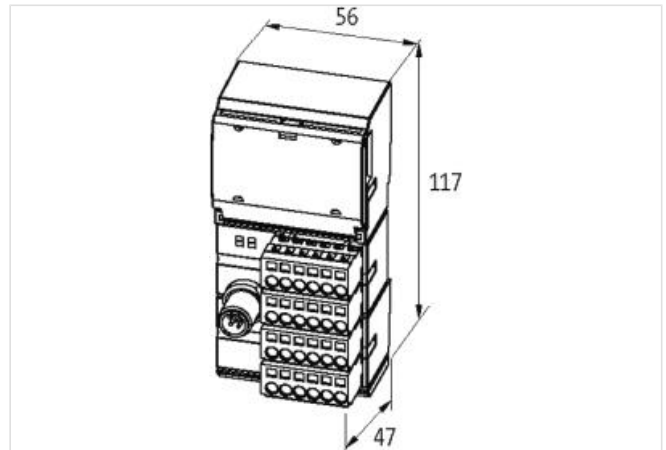

Tuote voi erota kuvassa olevasta



#### Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27061801      |
| ECLASS-6.1  | 27242608      |
| ECLASS-7.0  | 27242608      |
| ECLASS-8.0  | 27242608      |
| ECLASS-9.0  | 27242608      |
| ECLASS-10.1 | 27242608      |
| ECLASS-11.1 | 27242608      |
| ECLASS-12.0 | 27242608      |
| ETIM-5.0    | EC001604      |
| GTIN        | 4048879045582 |
| Pakkauskoko | 1             |
| Tullinumero | 85176200      |

#### Electrical data | Supply

|                          |            |
|--------------------------|------------|
| Operating voltage DC     | 24 V       |
| Norm operating voltage   | EN 61131-2 |
| Operating voltage US DC  | 24 V       |
| Operating voltage UA DC  | 24 V       |
| Current consumption max. | 100 mA     |
| Total current UA max.    | 4 A        |
| Total current US max.    | 4 A        |

#### Electrical data | Input

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.

Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 05.05.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

|                                                 |                                       |
|-------------------------------------------------|---------------------------------------|
| Overload resistant                              | yes                                   |
| Short-circuit protected                         | yes                                   |
| Type input                                      | PNP (EN 61131-2)                      |
| Input filter time                               | 1 ms                                  |
| Current carrying capacity max.                  | 0,7 A                                 |
| <b>Electrical data   Output</b>                 |                                       |
| Overload resistant                              | yes                                   |
| Short-circuit protected                         | yes                                   |
| Output current per pin max.                     | 0,5 A                                 |
| Lamp load                                       | 10 W                                  |
| <b>Diagnostics</b>                              |                                       |
| Diagnostic                                      | Under voltage                         |
| Diagnostic via BUS                              | per module and channel                |
| Diagnostic via LED                              | per module and channel (only outputs) |
| Short circuit diagnosis                         | yes                                   |
| LED display                                     | Ethernet connection/data traffic      |
| Overload diagnosis                              | yes                                   |
| <b>Installation   Pin assignment</b>            |                                       |
| Terminal row X2                                 | Input/Output                          |
| Terminal row X3                                 | Input/Output                          |
| <b>Device protection   Electrical</b>           |                                       |
| Degree of protection (EN IEC 60529)             | IP20                                  |
| Galvanic separation (operating voltage)         | yes                                   |
| Galvanic separation input/output                | yes                                   |
| <b>Mechanical data</b>                          |                                       |
| Number extension modules max.                   | 3                                     |
| <b>Mechanical data   Mounting data</b>          |                                       |
| Mounting method                                 | geschnappt                            |
| Suitable for mounting type                      | mounting rail, (EN 60715)             |
| Height                                          | 117 mm                                |
| Width                                           | 56 mm                                 |
| Depth                                           | 47 mm                                 |
| <b>Environmental characteristics   Climatic</b> |                                       |
| Operating temperature min.                      | 0 °C                                  |
| Operating temperature max.                      | 55 °C                                 |
| Storage temperature min.                        | -20 °C                                |
| Storage temperature max.                        | 85 °C                                 |
| <b>Conformity</b>                               |                                       |
| Product standard                                | EN 61131-2                            |
| <b>Connection type 5</b>                        |                                       |
| Connection type 1                               | Cube67 In                             |
| Connection type 2                               | X0                                    |
| Connection type 3                               | X1                                    |
| Connection type 4                               | X2                                    |
| Connection type 5                               | X2                                    |
| Family construction form                        | M12                                   |
| Gender                                          | female                                |
| Color contact carrier                           | black                                 |
| Coding                                          | A                                     |
| No. of poles                                    | 6                                     |

|                          |                           |
|--------------------------|---------------------------|
| PIN 1                    | 24 V DC (UA)              |
| PIN 2                    | 24 V DC (US)              |
| PIN 3                    | 0 V                       |
| PIN 4                    | Bus internal              |
| PIN 5                    | Bus internal              |
| PIN 6                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 6                         |
| PIN 1                    | UA                        |
| PIN 2                    | UA                        |
| PIN 3                    | UI                        |
| PIN 4                    | UI                        |
| PIN 5                    | 0 V                       |
| PIN 6                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 6                         |
| PIN 1                    | FE                        |
| PIN 2                    | FE                        |
| PIN 3                    | 0 V                       |
| PIN 4                    | 0 V                       |
| PIN 5                    | 0 V                       |
| PIN 6                    | 0 V                       |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 6                         |
| PIN 1                    | DI 0                      |
| PIN 2                    | DI 1                      |
| PIN 3                    | DI 2                      |
| PIN 4                    | DI 3                      |
| PIN 5                    | US                        |
| PIN 6                    | US                        |
| Connection               | Spring clamp terminals FK |
| Family construction form | terminal                  |
| Gender                   | female                    |
| Color contact carrier    | colorless                 |
| No. of poles             | 6                         |
| PIN 1                    | DO 0                      |
| PIN 2                    | DO 1                      |
| PIN 3                    | DO 2                      |
| PIN 4                    | DO 3                      |
| PIN 5                    | 0 V                       |
| PIN 6                    | 0 V                       |