
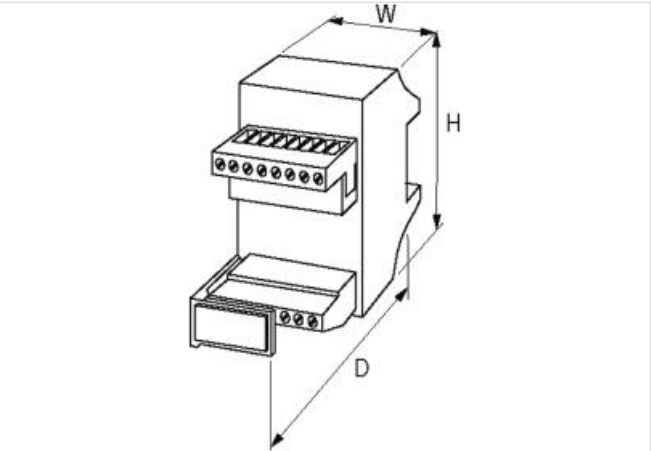


TRANSFER MODULE FOR DIN RAIL MOUNTING

23-pole  
for 1× 11- and 1× 12-pole spring clamp terminals  
pre-wired to push-in spring clamp terminals

[Linkki tuotteeseen](#)

Kuvat

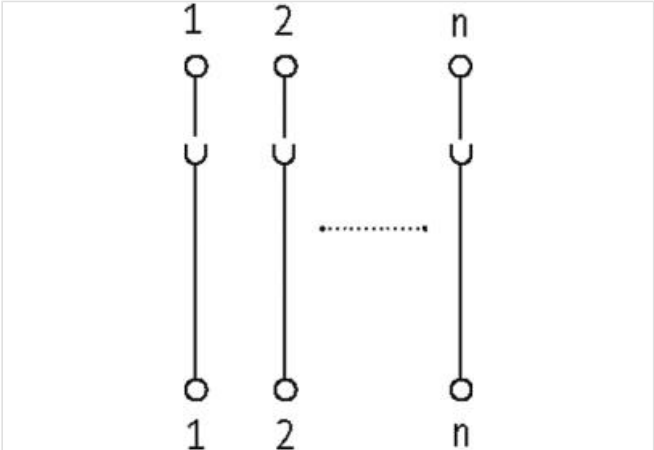

Tuote voi erota kuvassa olevasta



| Kaupalliset tiedot |          |
|--------------------|----------|
| ECLASS-6.0         | 27143424 |
| ECLASS-6.1         | 27260708 |
| ECLASS-7.0         | 27141152 |
| ECLASS-8.0         | 27141152 |
| ECLASS-9.0         | 27141152 |
| ECLASS-10.1        | 27141152 |
| ECLASS-11.1        | 27141152 |
| ECLASS-12.0        | 27141152 |

|                                                 |                                |
|-------------------------------------------------|--------------------------------|
| ETIM-5.0                                        | EC001583                       |
| GTIN                                            | 4048879315692                  |
| Pakkauskoko                                     | 1                              |
| Tullinumero                                     | 85369010                       |
| <b>Electrical data   Supply</b>                 |                                |
| Operating voltage DC                            | 24 V                           |
| Operating current max.                          | 8 A                            |
| <b>Installation</b>                             |                                |
| Connection cross-section solid max.             | 1 mm <sup>2</sup>              |
| <b>Installation   Connection</b>                |                                |
| Connection                                      | Push-In spring clamp terminals |
| <b>Device protection   Electrical</b>           |                                |
| Overvoltage category (EN 60664-1)               | III                            |
| <b>Mechanical data   Mounting data</b>          |                                |
| Mounting method                                 | geschnappt                     |
| Suitable for mounting type                      | mounting rail, (EN 60715)      |
| Height                                          | 75 mm                          |
| Width                                           | 45 mm                          |
| Depth                                           | 65 mm                          |
| <b>Environmental characteristics   Climatic</b> |                                |
| Operating temperature min.                      | -20 °C                         |
| Operating temperature max.                      | 60 °C                          |