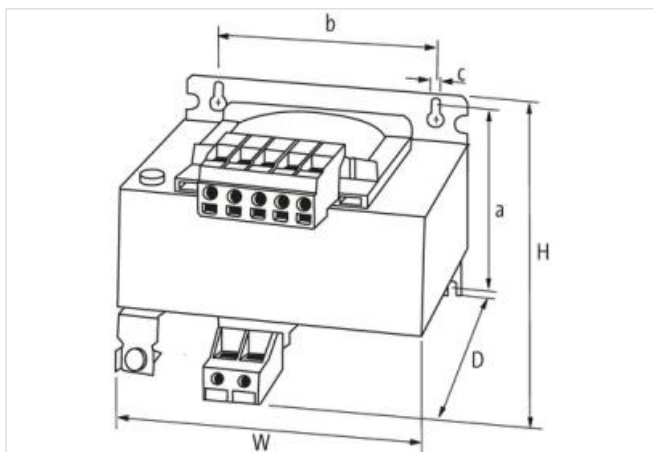
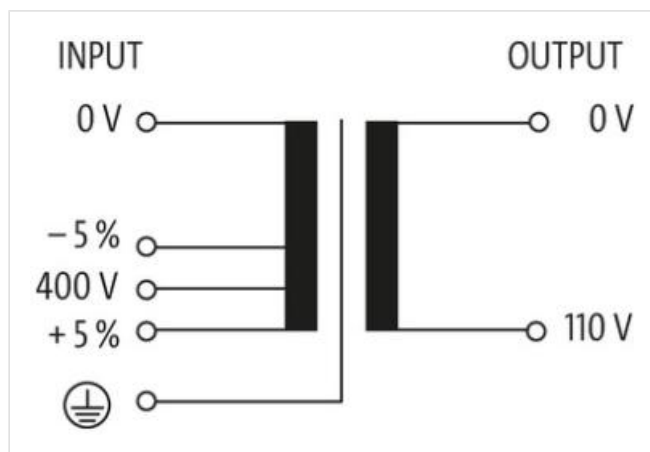


MET SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:500VA IN:400VAC±5% OUT:110VAC

Single-phase - Control and Isolation Transformers
 500 VA
 Isolation class T 40/B

[Linkki tuotteeseen](#)
Kuvat


Tuote voi erota kuvassa olevasta


Kaupalliset tiedot

ECLASS-6.0	27031202
ECLASS-6.1	27031302
ECLASS-7.0	27031302
ECLASS-8.0	27031302
ECLASS-9.0	27031302
ECLASS-10.1	27031302

ECLASS-11.1	27031302
ECLASS-12.0	27031302
ETIM-5.0	EC002485
GTIN	4048879073882
Pakkauskoko	1
Tullinumero	85043180

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC	400 V
Input voltage AC min.	380 V
Input voltage AC max.	420 V
Current input AC	2,67 A
Max. inrush current	23 A
Short-circuit current	31 A

Electrical data | Output

Output voltage AC 1	110 V
Output voltage adjustable	no
Power rating AC max.	500 VA

Device protection | Electrical

Insulation test voltage input - output	5,8 kV
--	--------

Mechanical data | Mounting data

Mounting method	screwed
Mounting dimension a	88 mm
Mounting dimension b	122 mm
Mounting dimension c	7 mm
Height	110 mm
Width	150 mm
Depth	144 mm
Diameter bore	7 mm
Length bore	11 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	40 °C
Storage temperature min.	-20 °C
Storage temperature max.	80 °C

Conformity

Product standard	EN 61558-1, EN 61558-2-4, EN 62041 category 0
------------------	---