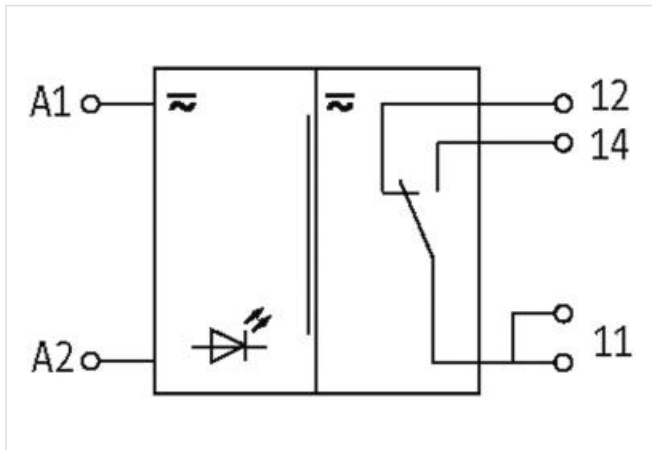


MIRO 6.2 PLUGGABLE PLUG IN MODULE INPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 6 A

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

Kaupalliset tiedot

ECLASS-6.0	27371601
ECLASS-6.1	27371601
ECLASS-7.0	27371601
ECLASS-8.0	27371601
ECLASS-9.0	27371601
ECLASS-10.1	27371601
ECLASS-11.1	27371601
ECLASS-12.0	27371601
ETIM-5.0	EC001437
GTIN	4048879021357
Pakkauskoko	1
Tullinumero	85364900

Electrical data | Input

Input voltage AC	24 V
Input voltage DC	24 V

Electrical data | Output

Switching voltage AC max.	250 V
Switching voltage DC max.	30 V
Switching current DC	1 mA
Switching current max.	6 A

Device protection | Electrical

Rated insulation voltage	300 V
--------------------------	-------

Mechanical data

Drop-out time max.	6 ms
Response time max.	5 ms

Mechanical data | Material data

Material contact	Ag Sn O2
------------------	----------

Mechanical data | Mounting data

Mounting method	inserted
Height	15 mm
Width	5 mm
Depth	28 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	60 °C
Storage temperature min.	-40 °C
Storage temperature max.	60 °C