


MODLINK MSDD DBL COMBI INSERT FRANCE

1xRJ45 fem./fem. + RCD opening

- 1× France (UTE-NF) white
- 1× RJ45, 8-pole metal, CAT5e (female/female)
- 1× FI cut-out

Linkki tuotteeseen

Kuvat

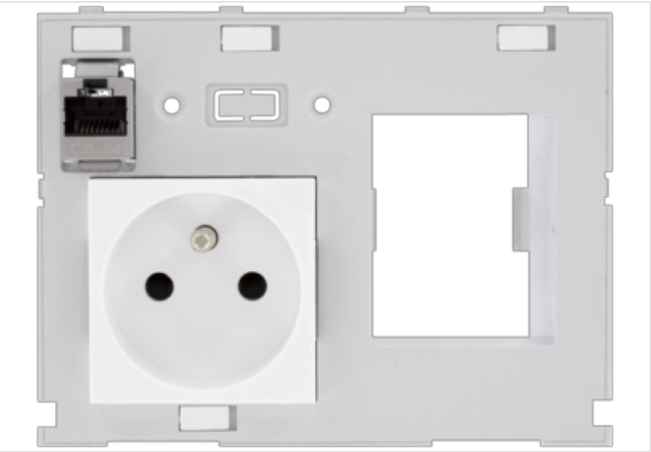

Tuote voi erota kuvassa olevasta



Kaupalliset tiedot

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27189217      |
| ECLASS-6.1  | 27189217      |
| ECLASS-7.0  | 27189217      |
| ECLASS-8.0  | 27189217      |
| ECLASS-9.0  | 27182806      |
| ECLASS-10.1 | 27182806      |
| ECLASS-11.1 | 27182806      |
| ECLASS-12.0 | 27182806      |
| ETIM-5.0    | EC000020      |
| GTIN        | 4048879384513 |
| Pakkauskoko | 1             |
| Tullinumero | 85366990      |

Mechanical data | Mounting data

|        |        |
|--------|--------|
| Height | 88 mm  |
| Width  | 116 mm |
| Depth  | 70 mm  |

Environmental characteristics | Climatic

|                          |       |
|--------------------------|-------|
| Storage temperature min. | 5 °C  |
| Storage temperature max. | 40 °C |

Shielding plate

|                        |                  |
|------------------------|------------------|
| Connection information | Threaded hole M4 |
|------------------------|------------------|

Tightening torque 0,9 Nm

**France (UTE-NF)**

|                               |                    |
|-------------------------------|--------------------|
| Connection cross section max. | 4 mm <sup>2</sup>  |
| AWG number max.               | 12                 |
| Operating voltage AC          | 250 V              |
| Operating current             | 16 A               |
| Connection                    | Screw terminals SK |
| No. of poles                  | 2 + PE             |
| Connections per pole          | 2                  |
| Protection contact present    | yes                |

**RJ45**

|                                       |                   |
|---------------------------------------|-------------------|
| Operating voltage AC max. (UL-listed) | 30 V              |
| Operating voltage DC max. (UL-listed) | 42,4 V            |
| Current operating max. (UL)           | 175 mA            |
| Family construction form              | RJ45              |
| Family type Back side                 | RJ45              |
| Cable category min.                   | Cat5e             |
| Looking techniques                    | Snap-in connector |