



Modlight Illumix Slim Line 24W


LED machine lamp, IP54, 24VDC, M8 connection

Modlight Illumix Slim Line
24 W

[Linkki tuotteeseen](#)

Kuvat

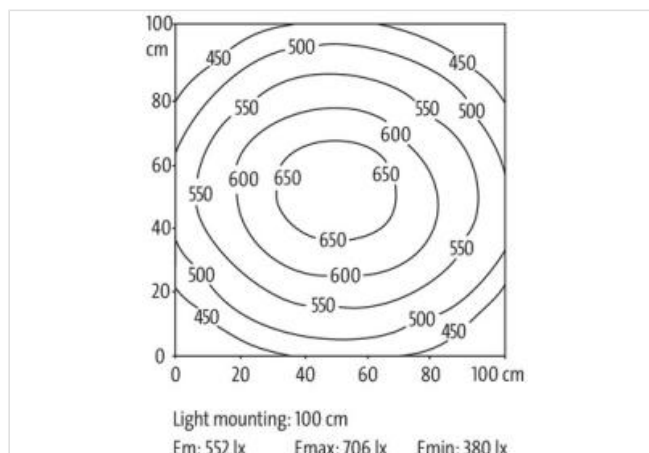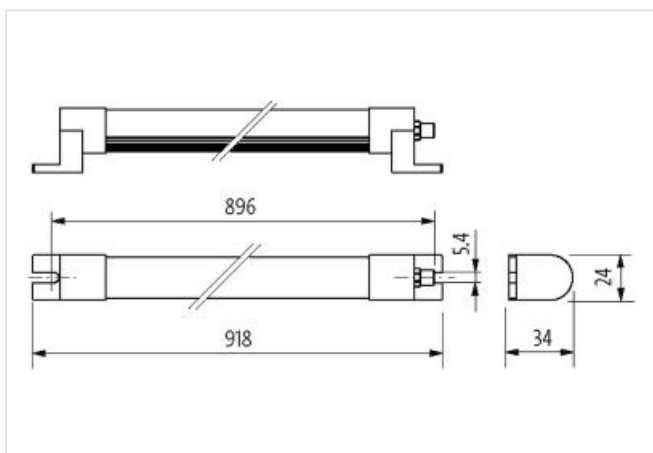



Electrical data | Supply

HMI | Illumination properties

Installation | Connection

Installation | Pin assignment

Device protection | Electrical

Installation height max. ASL	2000 m
Degree of protection (EN IEC 60529)	IP54
Device protection Mechanical	
Shock resistance (EN IEC 60068-2-27)	50 g, 11 ms
Vibration resistance (EN IEC 60068-2-6)	10 mm (2 ... 9 Hz), 3 g (9 ... 200 Hz)
Mechanical data Material data	
Coating housing	eloxiert
Material housing	Aluminium
Material light cover	Diffuse polystyrene (PS)
Mechanical data Mounting data	
Height	34 mm
Width	918 mm
Depth	24 mm
Screw head diameter max.	12 mm
Screw head thread max.	M5
Environmental characteristics Climatic	
Operating temperature min.	-30 °C
Operating temperature max.	50 °C
Relative humidity min. (operation)	5 %
Relative humidity max. (operation)	95 %
Connection type 1	
Family construction form	M8
Gender	male
Coding	A
No. of poles	4
PIN 1	n.c.
PIN 2	n.c.
PIN 3	0 V DC
PIN 4	24 V DC