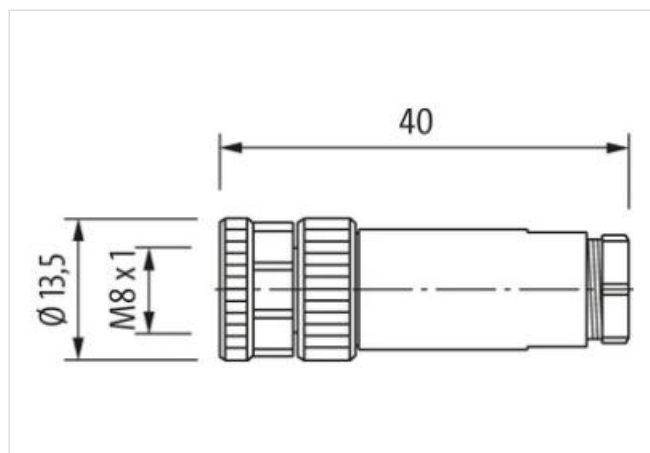
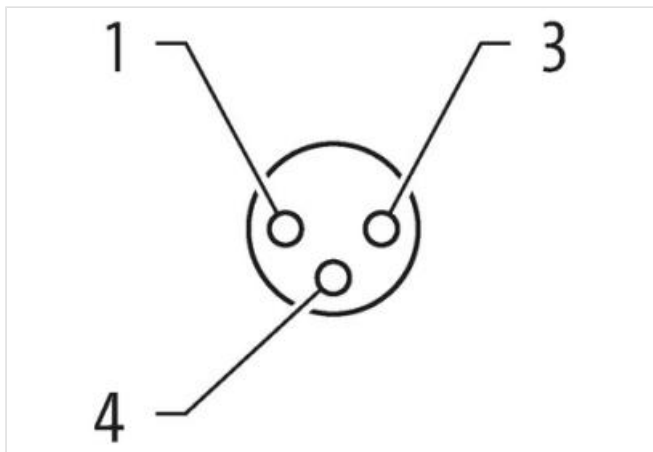
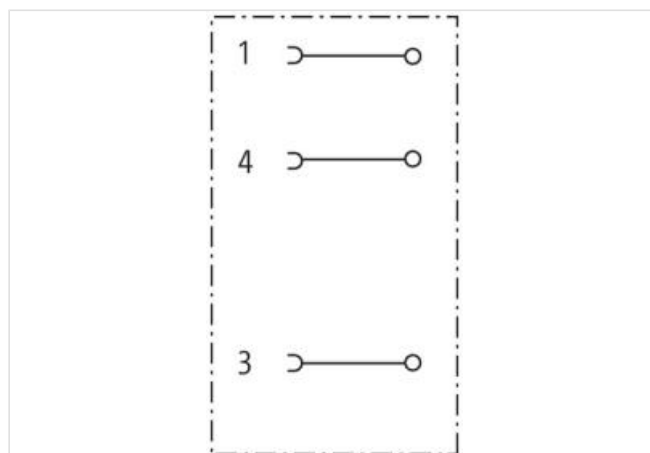


M8 female 0° A-cod. screw terminal3-pol., 0,14 - 0.5mm², 2,5 - 5mm

Female straight

M8, 3-pole

Screw terminal

Connection cross section: 0.14...0.5 mm²[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

Coating contact	gold plated
Family construction form	M8
Material contact	Brass
No. of poles	3
Width across flats	SW12.5
Degree of protection (EN IEC 60529)	IP67

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.

Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 10.05.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

Kaupalliset tiedot	
ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
GTIN	4048879224512
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC max.	50 V
Operating voltage DC max.	60 V
Current operating per contact max.	4 A
Installation	
Connection cross section min.	0,14 mm ²
Connection cross section max.	0,5 mm ²
Installation Connection	
Connection	Screw terminals SK
Installation Pin assignment	
Coding	A
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Insulation resistance min.	100 MΩ
Overvoltage category (EN 60664-1)	III
Overvoltage category (EN 60950-1)	II
Mechanical data Material data	
Material housing	PA
Mechanical data Mounting data	
Clamping range min.	2,5 mm
Clamping range max.	5 mm
Height	40 mm
Width	13,5 mm
Depth	13,5 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	85 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.