

**M8 male 0° A-cod. with cable shielded**

PUR 1x4xAWG26 shielded gn UL/CSA+drag ch. 0.8m

Ethernet CAT5e

Male straight

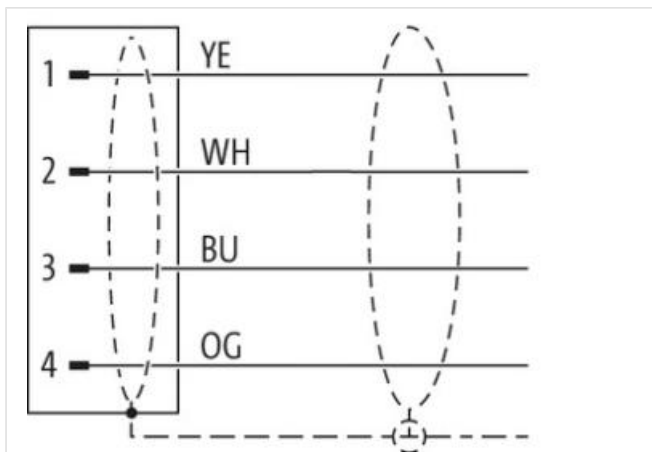
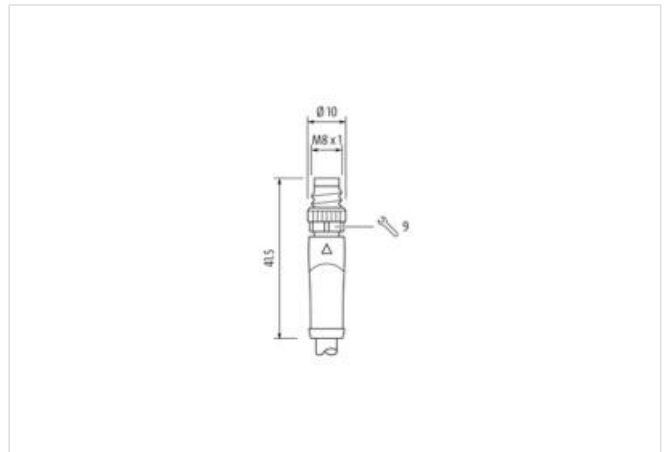
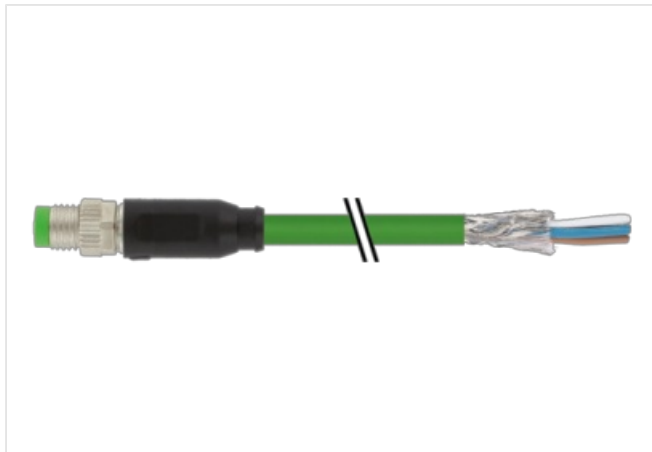
M8, 4-pole

shielded

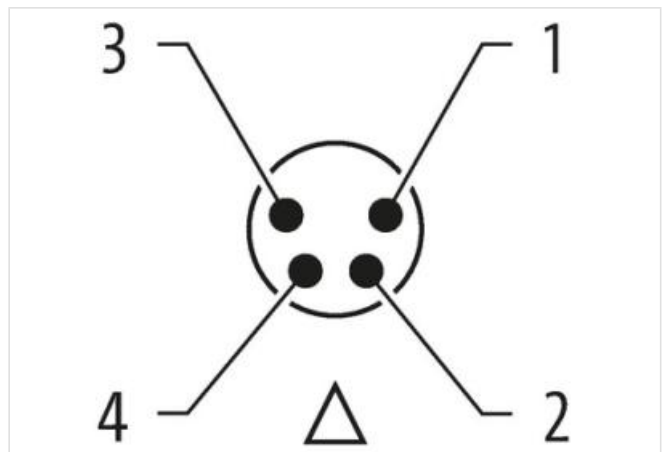
Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta



Cable length 0,8 m

**Side 1**

Tightening torque 0,4 Nm

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.  
Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 21.05.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

|                                           |                   |
|-------------------------------------------|-------------------|
| Mounting method                           | inserted, screwed |
| Family construction form                  | M8                |
| Thread                                    | M8 x 1            |
| suitable for corrugated tube (internal Ø) | 8,5 mm            |
| Cable outlet                              | straight          |
| Coding                                    | A                 |
| Material                                  | PUR               |
| No. of poles                              | 4                 |
| Width across flats                        | SW9               |
| Degree of protection (EN IEC 60529)       | IP65, IP66K, IP67 |

**Side 2**

|                           |                |
|---------------------------|----------------|
| Stripping length (jacket) | 20 mm          |
| Family construction form  | free cable end |

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27061801      |
| ECLASS-6.1  | 27060307      |
| ECLASS-7.0  | 27060307      |
| ECLASS-8.0  | 27060307      |
| ECLASS-9.0  | 27060307      |
| ECLASS-10.1 | 27060307      |
| ECLASS-11.1 | 27060307      |
| ECLASS-12.0 | 27060307      |
| ETIM-5.0    | EC001855      |
| GTIN        | 4065909062043 |
| Pakkauskoko | 1             |
| Tullinumero | 85444290      |

**Electrical data | Supply**

|                                    |       |
|------------------------------------|-------|
| Operating voltage DC               | 60 V  |
| Current operating per contact max. | 1,5 A |

**Industrial communication**

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| Transfer parameters         | With reference to CAT5, Class D (ISO/IEC 11801) |
| Data transmission rate max. | 100 MBit/s                                      |

**Industrial communication | Ethernet functionality**

|        |             |
|--------|-------------|
| duplex | Full duplex |
|--------|-------------|

**Diagnostics**

|                       |    |
|-----------------------|----|
| Status indication LED | no |
|-----------------------|----|

**Installation | Connection**

|                           |        |
|---------------------------|--------|
| Stripping length (jacket) | 20 mm  |
| Mounting set              | M8 x 1 |

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                           |                  |
|---------------------------|------------------|
| Coating locking           | Nickeled         |
| Coating of fitting        | nickel plated    |
| Locking material          | Zinc die-casting |
| Material screw connection | Brass            |

**Mechanical data | Mounting data**

| Installation   Cable                              |                                                     |
|---------------------------------------------------|-----------------------------------------------------|
| wire arrangement                                  | white, orange, blue, yellow                         |
| Cable identification                              | 791                                                 |
| Jacket Color                                      | green                                               |
| Type of Certificate                               | cURus                                               |
| Amount stranding                                  | 1                                                   |
| Stranding                                         | 4 wires star-shaped twisted                         |
| Cable shielding (type)                            | copper braid, tinned                                |
| Cable shielding (coverage)                        | 85 %                                                |
| Banding                                           | Fiber tape, Fleece, Foil                            |
| Filler                                            | yes                                                 |
| wire arrangement                                  | white, orange, blue, yellow                         |
| Cable weigth                                      | 59,4 g/m                                            |
| Material jacket                                   | PUR                                                 |
| Freedom from ingredients (jacket)                 | lead-free, CFC-free, halogen-free                   |
| Outer-diameter (jacket)                           | 4,9 mm                                              |
| Tolerance outer diameter (sheath)                 | ± 5 %                                               |
| Material wire insulation                          | PP                                                  |
| Amount wires                                      | 4                                                   |
| Outer diameter insulation                         | 1,04 mm                                             |
| Outer diameter tolerance core insulation          | ± 5 %                                               |
| Ingredient freeness wire insulation               | lead-free, CFC-free, halogen-free                   |
| Amount strands (wire)                             | 19                                                  |
| Diameter of single wires                          | 26 AWG                                              |
| Conductor crosssection (wire)                     | 26 AWG                                              |
| Material conductor wire                           | copper stranded wire, tinned                        |
| Nominal voltage AC max.                           | 300 V                                               |
| Current load capacity (standard)                  | to DIN VDE 0298-4                                   |
| Current load capacity min. wire                   | 2,4 A                                               |
| Characteristic impedance                          | 100 Ω ± 15 % @ 100 MHz                              |
| Electrical resistance line constant wire          | 140 Ω/km                                            |
| AC withstand voltage (wire - wire)                | 0,7 kV @ 60 s                                       |
| Electric capacitance                              | 51000 pF/km                                         |
| Power frequency withstand voltage (wire - jacket) | 0,7 kV @ 60 s                                       |
| AC withstand voltage (wire - shield)              | 0,7 kV @ 60 s                                       |
| Min. operating temperature (static)               | -40 °C                                              |
| Max. operating temperature (fixed)                | 80 °C                                               |
| Operating temperature min. (dynamic)              | -30 °C                                              |
| Operating temperature max. (dynamic)              | 70 °C                                               |
| Flame resistance                                  | IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090 |
| chemical resistance                               | Good, application-related testing                   |

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.  
Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 21.05.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | [shop@murrelektronik.fi](mailto:shop@murrelektronik.fi) | [shop.murrelektronik.fi](http://shop.murrelektronik.fi)

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Gasoline resistance           | Good, application-related testing                    |
| Oil resistance                | DIN EN 60811-404   Good, application-related testing |
| Bending radius (fixed)        | 7,5 x Outer diameter                                 |
| Bending radius (dynamic)      | 12,5 x Outer diameter                                |
| Traversing distance (C-track) | 5 m                                                  |
| Travel speed (C-track)        | 3 m/s                                                |