



M12 female 90° A-cod. screw terminal

5-pol., 0,14 - 1,5mm², 2,5 - 8mm


Female 90°
M12, 5-pole
Screw terminals
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Linkki tuotteeseen

Kuvat

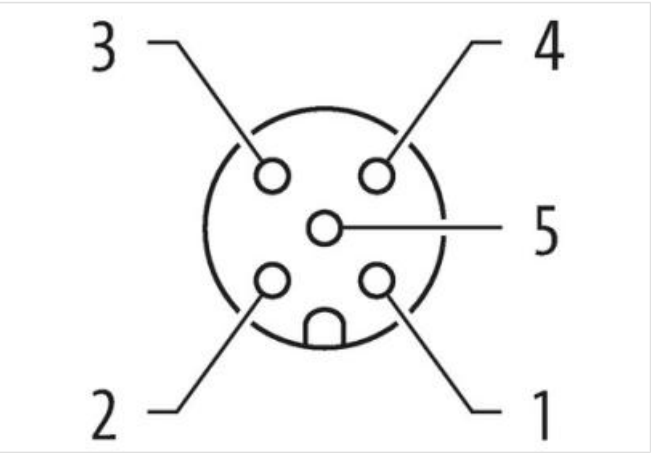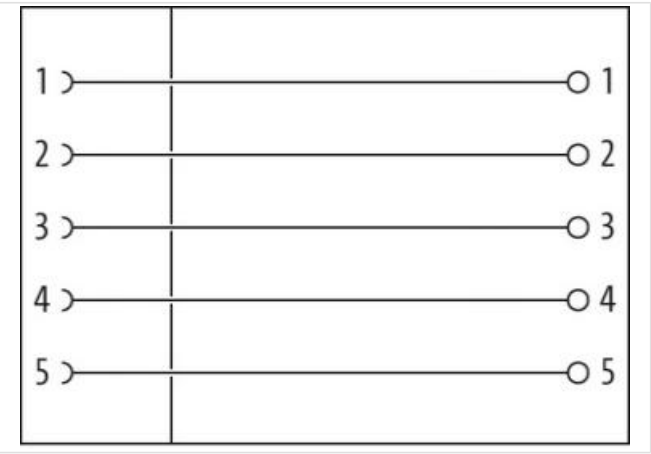

Tuote voi erota kuvassa olevasta

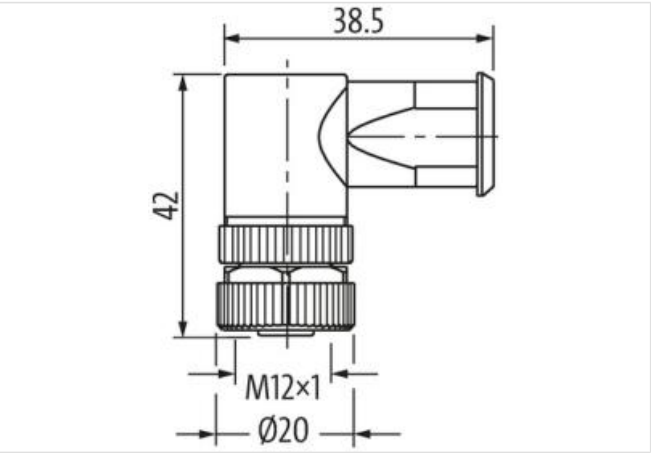

Side 1

Family construction form	M12
Degree of protection (EN IEC 60529)	IP67

Kaupalliset tiedot

ECLASS-6.0	27279221
ECLASS-6.1	27260702

ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC002635
GTIN	4048879428774
Pakkauskoko	1
Tullinumero	85366990

Electrical data | Supply

Operating voltage AC max.	60 V
Operating voltage DC max.	60 V
Operating current per contact max. (40°C)	7,5 A

Installation

Connection cross section max.	1,5 mm ²
-------------------------------	---------------------

Installation | Connection

Tightening torque	0,6 Nm
-------------------	--------

Device protection | Electrical

Additional condition protection degree	inserted, screwed
--	-------------------

Mechanical data | Mounting data

Mounting method	Schraubgewinde
Clamping range min.	2,5 mm
Clamping range max.	8 mm

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C