




M12 female 90° A-cod. screw terminal

4-pol., 0,14 - 1,5mm², 2,5 - 8mm

Female 90°
M12, 4-pole
Screw terminals
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Linkki tuotteeseen

Kuvat

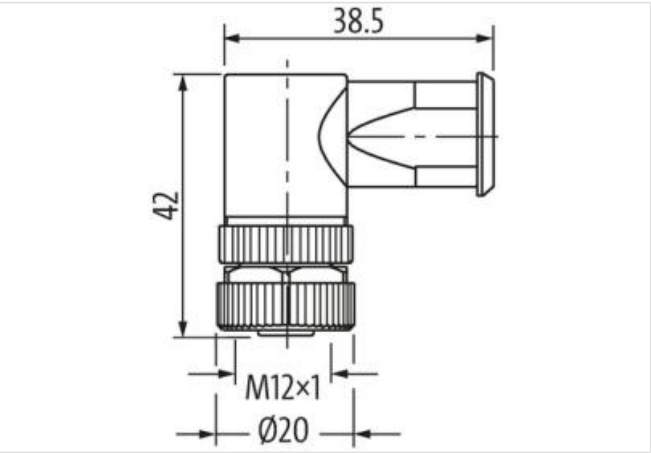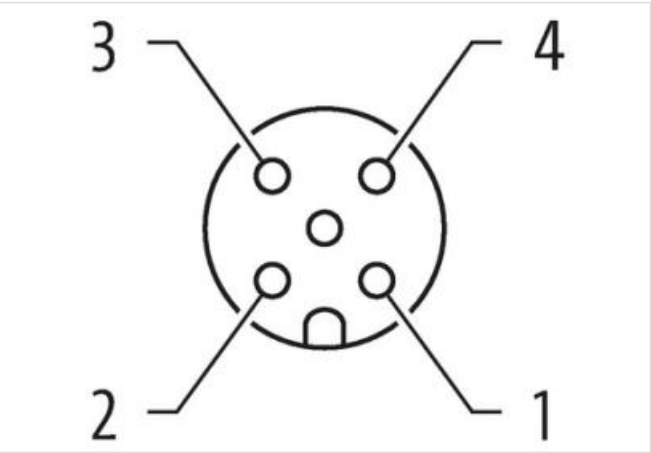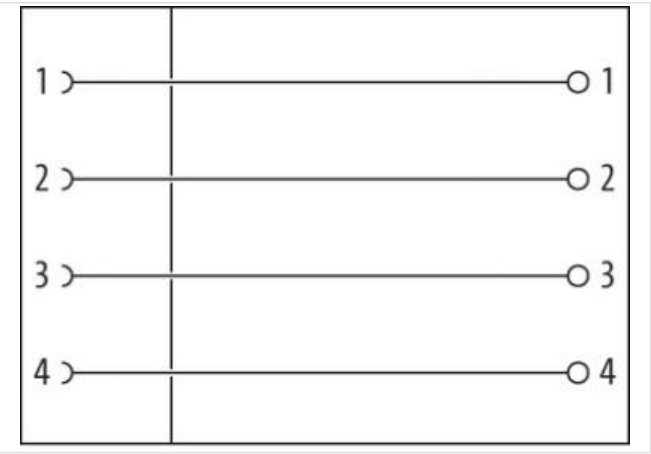

Tuote voi erota kuvassa olevasta



Side 1

Degree of protection (EN IEC 60529) IP67

Kaupalliset tiedot

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104

ECLASS-9.0	27440102
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC001855
GTIN	4048879838894
Pakkauskoko	1
Tullinumero	85366990

Electrical data | Supply

Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Operating current per contact max. (40°C)	7,5 A

Installation

Connection cross section min.	0,14 mm ²
Connection cross section max.	1,5 mm ²

Installation | Connection

Tightening torque	0,6 Nm
Mating cycles min.	100

Device protection | Electrical

Additional condition protection degree	screwed, mounted
Pollution Degree	3/2
Insulation resistance min.	100 MΩ

Mechanical data | Mounting data

Mounting method	Schraubgewinde
Clamping range min.	2,5 mm
Clamping range max.	8 mm
Height	42 mm
Width	28,5 mm
Depth	20 mm

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C