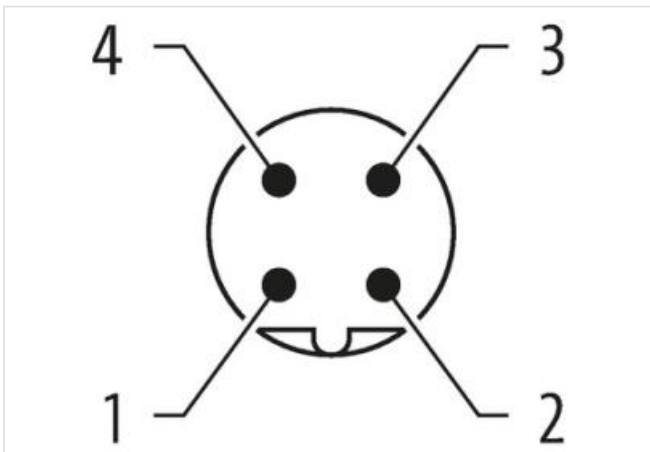
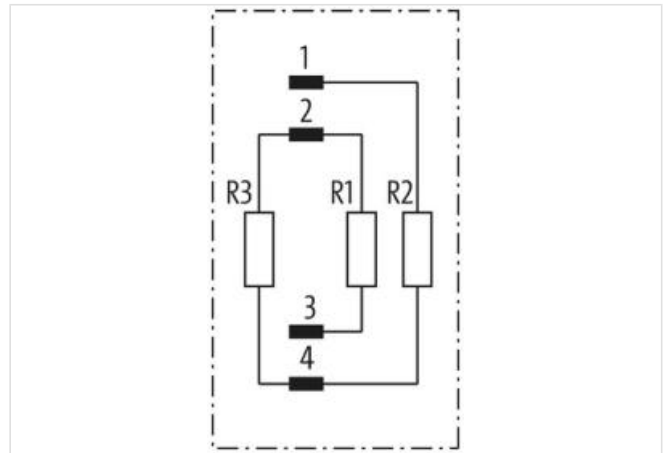



**Bus terminating plug M12 male B-cod.**

Profibus

PROFIBUS  
Terminating resistor  
Male  
M12, 4-pole  
B-coded

[Linkki tuotteeseen](#)**Kuvat**

Tuote voi erota kuvassa olevasta

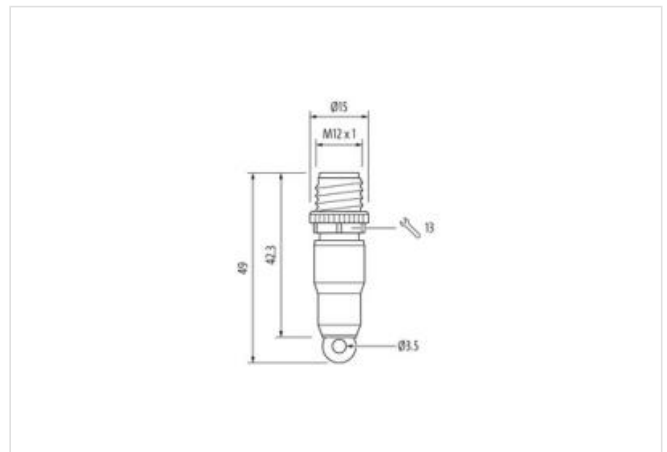**Side 1**

|                                     |         |
|-------------------------------------|---------|
| Tightening torque                   | 0,6 Nm  |
| Family construction form            | M12     |
| Thread                              | M12 x 1 |
| Degree of protection (EN IEC 60529) | IP67    |

**Kaupalliset tiedot**

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 19070403      |
| ECLASS-6.1  | 27260702      |
| ECLASS-7.0  | 27440390      |
| ECLASS-8.0  | 27440190      |
| ECLASS-9.0  | 27440190      |
| ECLASS-10.1 | 27440190      |
| ECLASS-11.1 | 27440190      |
| ECLASS-12.0 | 27440190      |
| ETIM-5.0    | EC001855      |
| GTIN        | 4048879198592 |
| Pakkauskoko | 1             |
| Tullinumero | 85331000      |

**Electrical data | Supply**

|                                       |      |
|---------------------------------------|------|
| Operating voltage DC max.             | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max.    | 4 A  |

**Installation | Pin assignment**

|        |   |
|--------|---|
| Coding | B |
|--------|---|

**Device protection | Electrical**

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Pollution Degree                       | 3                 |
| Rated surge voltage                    | 0,8 kV            |
| Material group (IEC 60664-1)           | I                 |

**Mechanical data | Material data**

|                  |                  |
|------------------|------------------|
| Coating locking  | Nickeled         |
| Locking material | Zinc die-casting |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C  |