

**SVS Eco valve plug A-18mm screw terminal**2-pol. + PE, 0,5 - 1,5mm<sup>2</sup>, 6 - 8mm, LED+VDR 24V

Form A (18 mm)

24 V AC/DC  $\pm 15\%$ 

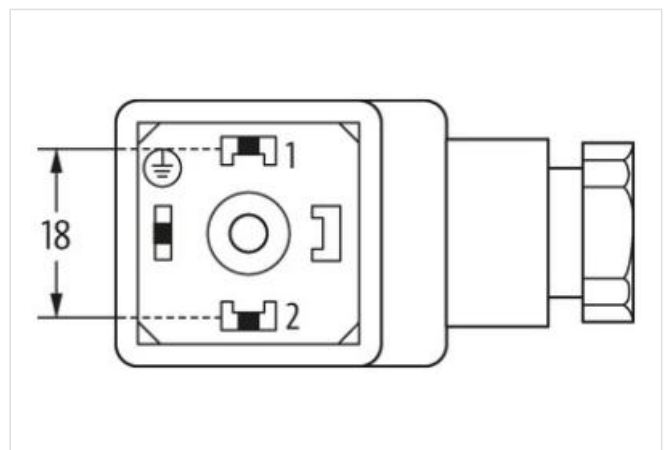
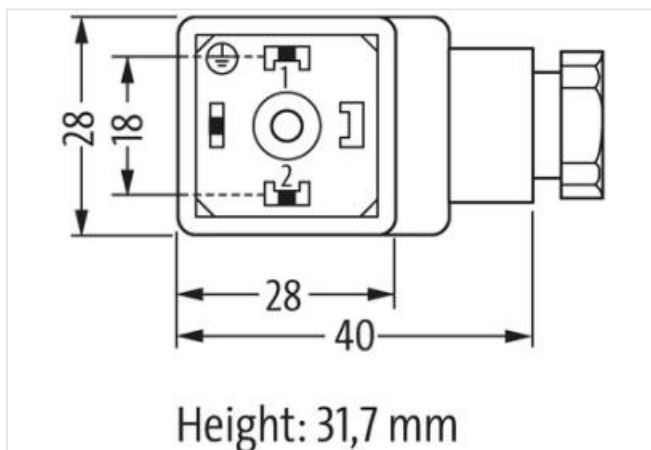
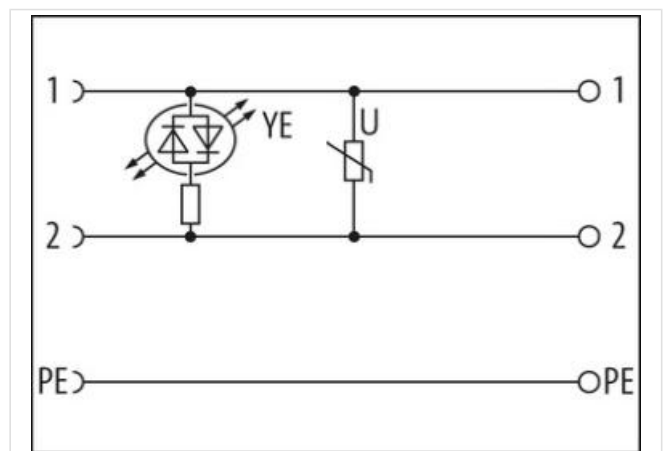
LED and VDR

metric

field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

**[Linkki tuotteeseen](#)****Kuvat**

Tuote voi erota kuvassa olevasta

**Side 1**

Mounting method inserted, screwed

Degree of protection (EN IEC 60529) IP65

**Kaupalliset tiedot**

Tämän tietolomakkeen tiedot on laadittu suurimmalla mahdollisella huolellisuudella.  
 Vahingonkorvausvastuu koskien tietojen oikeellisuutta, laajuutta ja ajankohtaisuutta kattaa ainoastaan törkeän laiminlyönnin. Versio: 02.05.2024

Murrelektronik Power Oy | Jussilankatu 6 | 15680 Lahti | Fon +358 20 7789810 | Fax +358 20 7789811 | shop@murrelektronik.fi | shop.murrelektronik.fi

|             |               |
|-------------|---------------|
| ECLASS-6.0  | 27279221      |
| ECLASS-7.0  | 27440104      |
| ECLASS-8.0  | 27440104      |
| ECLASS-9.0  | 27440102      |
| ECLASS-10.1 | 27440105      |
| ECLASS-11.1 | 27440105      |
| ECLASS-12.0 | 27440105      |
| ETIM-5.0    | EC002062      |
| GTIN        | 4048879187671 |
| Pakkauskoko | 1             |
| Tullinumero | 85366990      |

#### Electrical data | Supply

|                                    |        |
|------------------------------------|--------|
| Operating voltage AC               | 24 V   |
| Operating voltage AC min.          | 20,4 V |
| Operating voltage AC max.          | 26,4 V |
| Operating voltage DC               | 24 V   |
| Operating voltage DC min.          | 20,4 V |
| Operating voltage DC max.          | 26,4 V |
| Current operating per contact max. | 1,5 A  |

#### Diagnostics

|                       |        |
|-----------------------|--------|
| Status indication LED | yellow |
|-----------------------|--------|

#### Installation

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section min. | 0,5 mm <sup>2</sup> |
| Connection cross section max. | 1,5 mm <sup>2</sup> |

#### Installation | Connection

|                                  |           |
|----------------------------------|-----------|
| Tightening torque                | 0,4 Nm    |
| Tightening torque clamping screw | 0,2 Nm    |
| Mounting set                     | M16 x 1.5 |

#### Installation | Pin assignment

|              |        |
|--------------|--------|
| No. of poles | 2 + PE |
|--------------|--------|

#### Device protection | Electrical

|                                        |                   |
|----------------------------------------|-------------------|
| Additional condition protection degree | inserted, screwed |
| Additional suppressor                  | Varistor          |

#### Mechanical data | Material data

|                  |        |
|------------------|--------|
| Color housing    | opaque |
| Material gasket  | NBR    |
| Material housing | PA     |

#### Mechanical data | Mounting data

|                     |      |
|---------------------|------|
| fastening screw     | M3   |
| Clamping range min. | 6 mm |
| Clamping range max. | 8 mm |

#### Environmental characteristics | Climatic

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 90 °C  |