

**SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE**

24V LED+RC M16x1.5

Form A (18 mm)

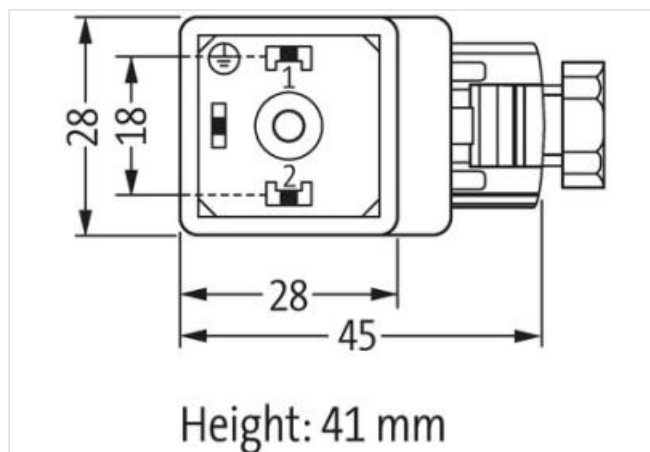
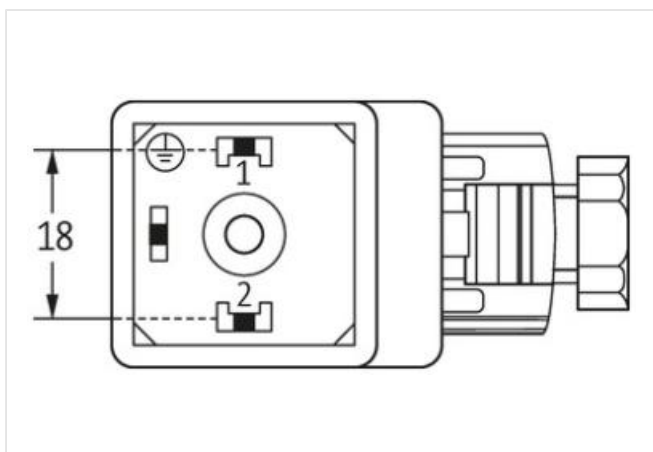
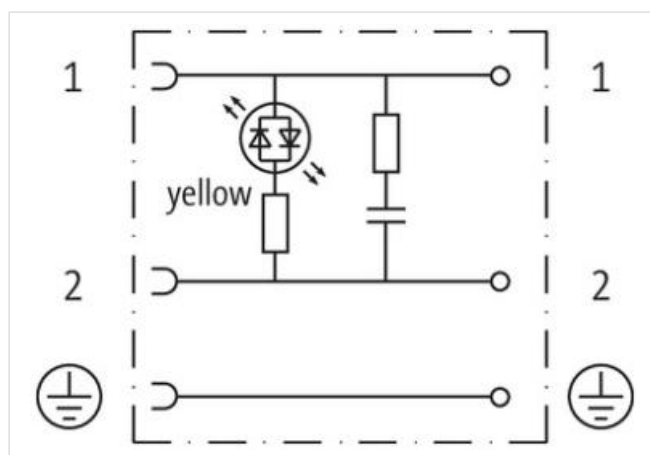
 24 V AC/DC  $\pm 25\%$ 

LED and RC

metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)
**Kuvat**


Tuote voi erota kuvassa olevasta

**Side 1**

Degree of protection (EN IEC 60529)

IP65

**Kaupalliset tiedot**

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27279221 |
| ECLASS-7.0  | 27440104 |
| ECLASS-8.0  | 27440104 |
| ECLASS-9.0  | 27440102 |
| ECLASS-10.1 | 27440105 |
| ECLASS-11.1 | 27440105 |

|                                          |                                                                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECLASS-12.0                              | 27440105                                                                                                                                              |
| ETIM-5.0                                 | EC002062                                                                                                                                              |
| GTIN                                     | 4048879187640                                                                                                                                         |
| Pakkauskoko                              | 1                                                                                                                                                     |
| Tullinumero                              | 85366990                                                                                                                                              |
| Electrical data   Supply                 |                                                                                                                                                       |
| Operating voltage AC                     | 24 V                                                                                                                                                  |
| Operating voltage DC                     | 24 V                                                                                                                                                  |
| Current operating per contact max.       | 2 A                                                                                                                                                   |
| Diagnostics                              |                                                                                                                                                       |
| Status indication LED                    | yellow                                                                                                                                                |
| Installation   Connection                |                                                                                                                                                       |
| Tightening torque                        | 0,4 Nm                                                                                                                                                |
| Mounting set                             | M3                                                                                                                                                    |
| Installation   Pin assignment            |                                                                                                                                                       |
| No. of poles                             | 2 + PE                                                                                                                                                |
| Device protection   Electrical           |                                                                                                                                                       |
| Additional condition protection degree   | inserted, screwed                                                                                                                                     |
| Environmental characteristics   Climatic |                                                                                                                                                       |
| Operating temperature min.               | -20 °C                                                                                                                                                |
| Operating temperature max.               | 60 °C                                                                                                                                                 |
| Important installation notes             |                                                                                                                                                       |
| Note on strain relief                    | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |
| Note on bending radius                   | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |