

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24V LED PG9

Form A (18 mm) for pressure switch

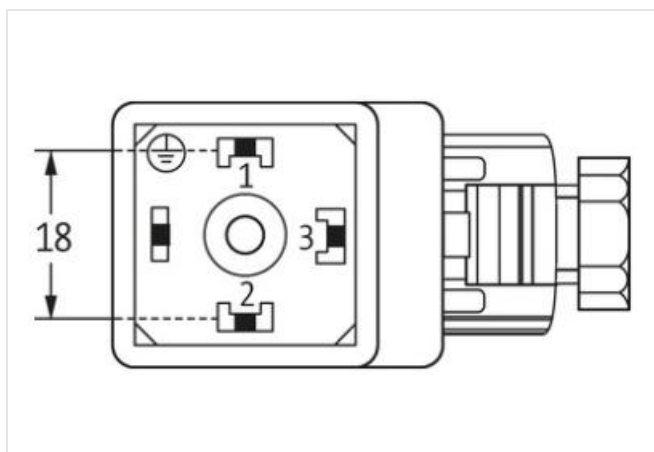
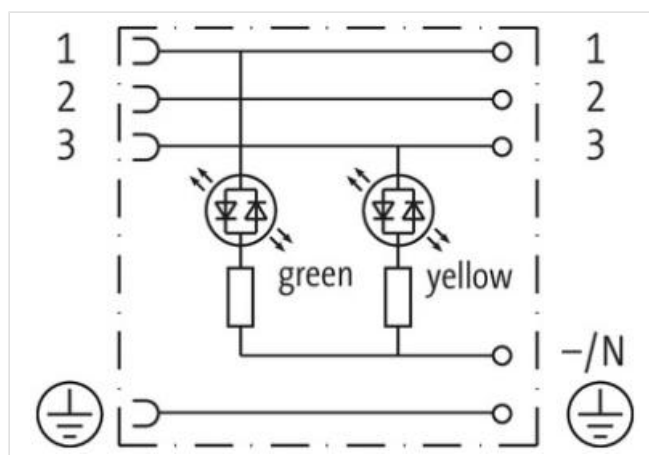
24 V AC/DC $\pm 25\%$

LED green (1) yellow (3)

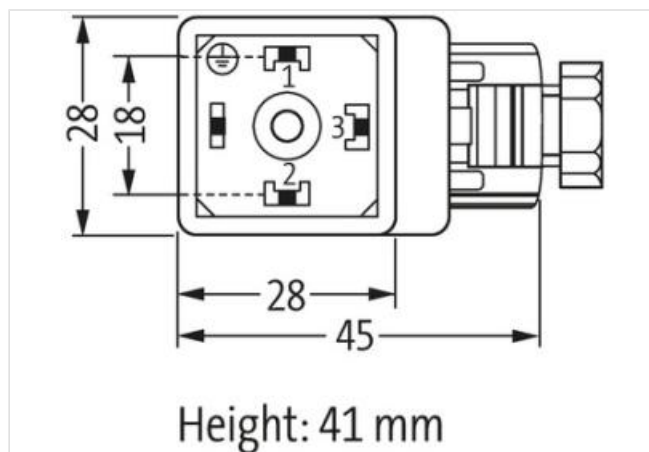
PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)
Kuvat


Tuote voi erota kuvassa olevasta


Side 1

Degree of protection (EN IEC 60529)

IP65

Kaupalliset tiedot

ECLASS-6.0

27279221

ECLASS-7.0

27440104

ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
GTIN	4048879187404
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	18 V
Operating voltage AC max.	30 V
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Current operating per contact max.	4 A
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M3
Installation Pin assignment	
No. of poles	3 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.