

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

12...30V DC LED M16x1.5 Power Switch

Form A (18 mm)

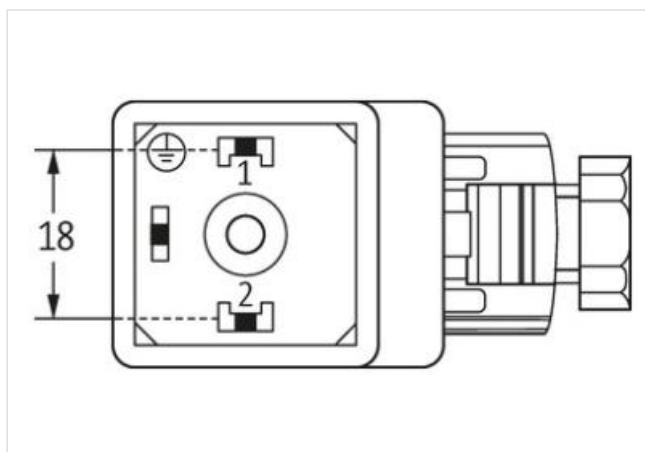
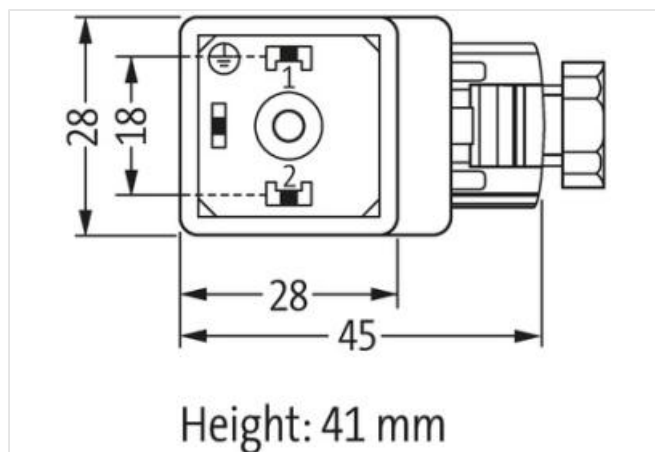
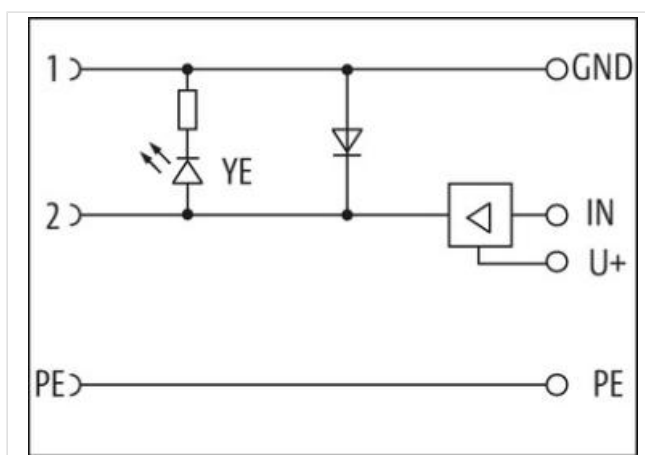
12...30 V DC

LED and switching amplifier

metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)
Kuvat


Tuote voi erota kuvassa olevasta


Side 1

Degree of protection (EN IEC 60529)

IP65

Kaupalliset tiedot

ECLASS-6.0

27279221

ECLASS-7.0

27440104

ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
GTIN	4048879187398
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage DC min.	12 V
Operating voltage DC max.	30 V
Current operating per contact max.	2 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	1,5 mm²
Installation Connection	
Connection information	field-wireable
Tightening torque	0,4 Nm
Mounting set	M16 x 1.5
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Short-circuit protected	yes
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	5 mm
Clamping range max.	10 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.