

SVS VALVE PLUG FORM B 10 MM FIELD-WIREABLE

24V LED+RC PG9

Form B (10 mm)

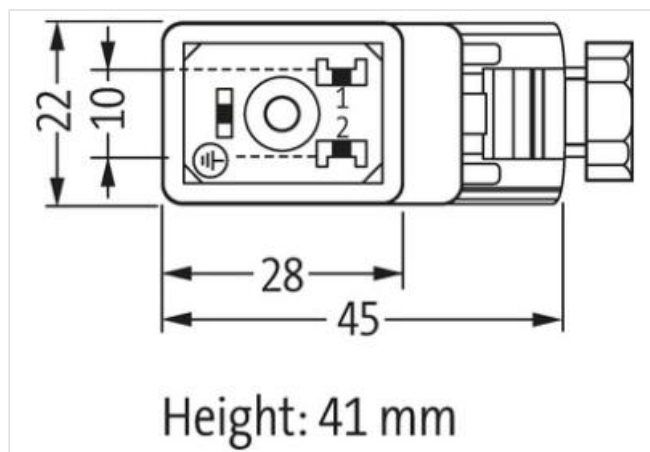
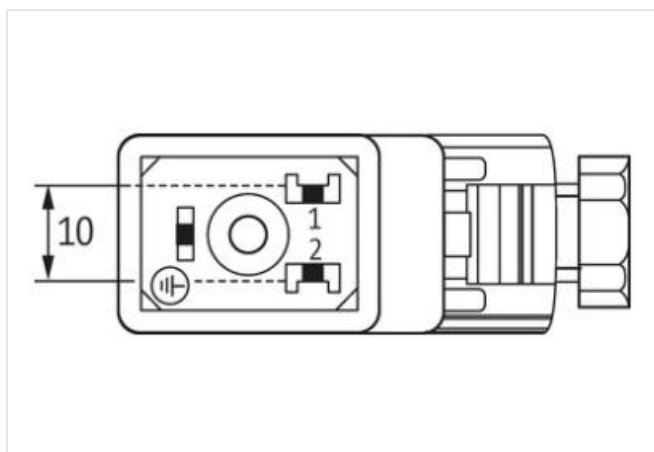
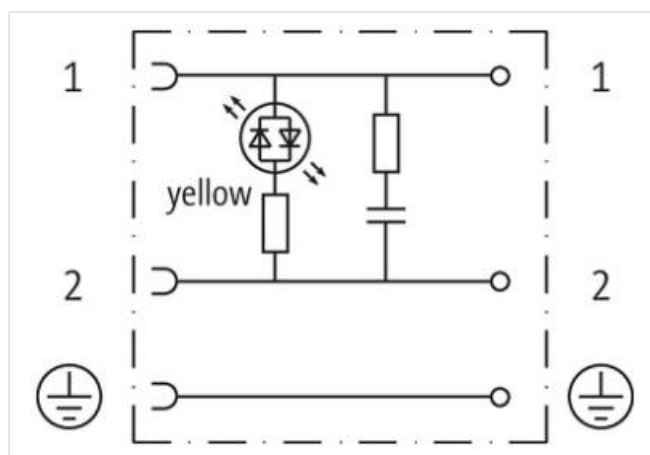
 24 V AC/DC $\pm 25\%$

LED and RC

PG9

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Linkki tuotteeseen](#)
Kuvat


Tuote voi erota kuvassa olevasta

Side 1

Degree of protection (EN IEC 60529)

IP65

Kaupalliset tiedot

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ETIM-5.0	EC002062
GTIN	4048879187312

Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage AC min.	18 V
Operating voltage AC max.	30 V
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Current operating per contact max.	2 A
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M3
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C