

SVS Eco valve plug C-8mm screw terminal

2-pol. + PE, max. 0,5mm², 4 -6mm, LED+VDR 110V

Form C (8 mm)

110 V AC/DC $\pm 10\%$

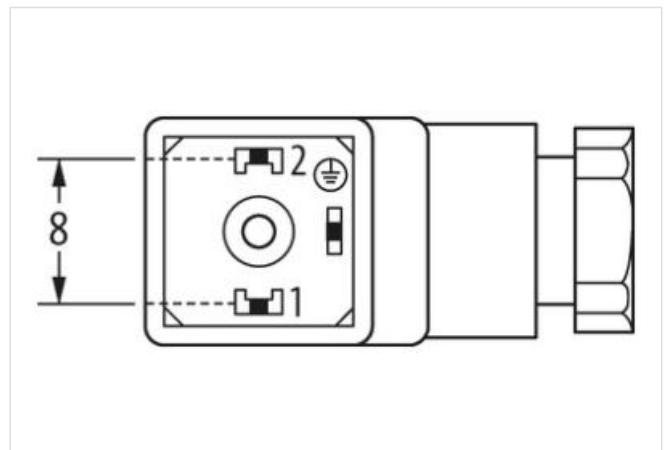
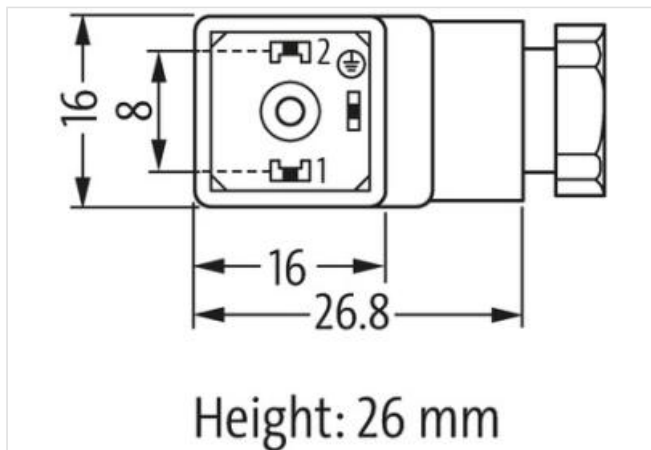
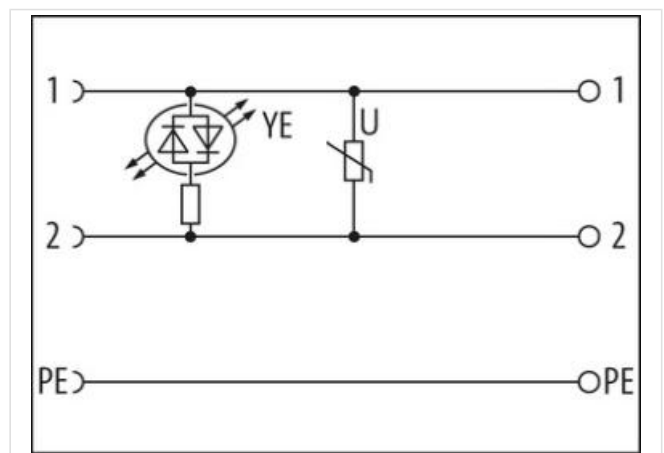
LED and VDR

metric

Field wireable (screw terminals)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Linkki tuotteeseen**Kuvat**

Tuote voi erota kuvassa olevasta

Side 1

Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65

Kaupalliset tiedot

ECLASS-6.0	27279221
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104

ECLASS-9.0	27440105
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
GTIN	4048879186995
Pakkauskoko	1
Tullinumero	85366990
Electrical data Supply	
Operating voltage AC	110 V
Operating voltage AC min.	99 V
Operating voltage AC max.	121 V
Operating voltage DC	110 V
Operating voltage DC min.	99 V
Operating voltage DC max.	121 V
Current operating per contact max.	1,5 A
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	0,5 mm²
Installation Connection	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M12 x 1.5
Installation Pin assignment	
No. of poles	2 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor
Mechanical data Material data	
Color housing	transparent
Material gasket	NBR
Material housing	PA
Mechanical data Mounting data	
fastening screw	M2.5
Clamping range min.	4 mm
Clamping range max.	6 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.